


Epson USA PowerLite Pro Cinema 9100



EPSON USA POWERLITE PRO CIN



A brief introduction to the Epson USA PowerLite Pro Cinema 9100. The LCD projector has an HDTV 1920 x 1080 resolution and a contrast of 36000:1. The manufacturer claims a lamp life of 4000 hours, which equates to over 5.5 years at 2 hours of use. The integrated lens shift gives freedom when positioning the projector. 1800 Ansi lumens ensure that a picture width of 431 cm is also possible. However, if room light is available, the picture should be a maximum of 287 cm wide. Playing 1080P is also no problem for the projector. The operating noise of just 28 decibels makes the projection quiet. The model was built by Epson USA in 2009 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



3 x 0,74" LCD TFT Panel mit MLA

HDTV 16/9 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

1800

800 Lux (bei 200 cm Screen)

Contrast

36000:1 full on/off

36000:1 full on/off

Black Level

0,0500 min. Lumen

0,022 min. Lumen

Lens shift

Vert.: +/-96% Hori.: +/-47%

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D-Blu-ray | 4K UHD-Blu-ray

Application

Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

200W UHE Lamp

Light Life

Article Nr.: ELPLP49

4000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 2,1

Objective

F=2,0-3,17 f=22,5-47,2 mm

Throw Ratio

1,37-2,88:1

Audio

Nein

Connections

2 x HDMI 1.3 in

D-sub 15 pin in

YUV in

S-Video in

Cinch Video in

RS232C

1 x 12V Trigger out



Ceiling Mounting

Yes, is possible.

Power


222W

Size WxHxD


390 x 145 x 450 mm (15,4"x5,7"x17,7") 25,45 L/dm³

Operating Noise

28dB

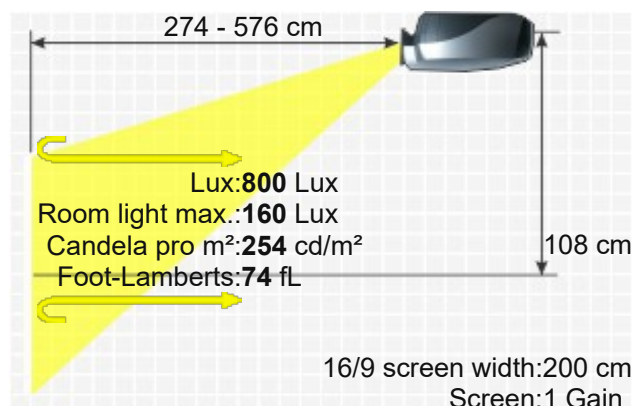

Weight	7,30 kg / 16,09 lbs.
Keystone	Vert.: +/-30°
Illumination	-
Frequenz	-
Foot-Lamberts	74 fL / max. 431 cm screen width 254 cd/m²
Features	■ Full HD 1080P compatible
	■ Lens shift Funktion
	■ Blank (Black screen button)
	■ Kensington Slot
	■ Gamma correction
Screen Mirroring	■ Overscan adjustable
	Optional only Chromecast / Fire TV / Apple TV / Mi Box Ads

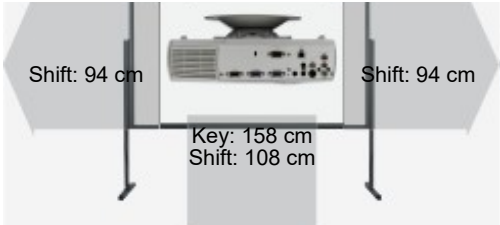

Optional accessories			
	Deckenhalterung Länge 100-120 mm	Halterung120	47,86 €
	Luftfilter universal	uni3mm	18,15 €

Status Data 2009 Discontinued (EOL) // Last update of the data: 2025-03-03

More Details



HCinema
<https://www.projector-database.com/pro/EpsonPowerLiteProCinema9100-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.