

Acer H6521ABD

ACER H6521ABD



Brief Introduction

Beta 2.5

With the H6521ABD, Acer offers a DLP projector with WUXGA 1920 x 1200 resolution and a contrast ratio of 10000:1. The lamp life is up to 10,000 hours, which is over 13.7 years when used for two hours a day. A picture width of up to 601 cm is possible; if the picture width is smaller (we recommend max. 401 cm), even rooms with residual light are no problem. Video signals of 1080P and 3D are also no problem for the projector. The model was built by Acer in 2018 and is no longer current, but is still a popular projector in our database.



1 x 0,48" DC3 DMD Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

3500
10000:1
0,3500 min. Lumen

1556 Lux (200 cm Screen width)
10000:1
0,156 min. Lumen

Resolution

WUXGA 1920 x 1200
2.304.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Homecinema | Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

250W Lamp

Light Life

Article Nr.: MC.JQ011.003

3500 h. 10000 h. in Eco Mode

Operating Costs

12,33% / 0,09 €

Focus

Manual

Zoom

Manual 1,1

Objective

F=2,10-2,31 f=15,59-17,14 mm

Throw Ratio

1,47-1,61:1

Audio


1 x 3W

Connections

HDMI in 1.4a
D-sub 15pin in
Cinch Video in
Mini Jack Audio in
USB

Ceiling Mounting Power

Yes, is possible.
300W

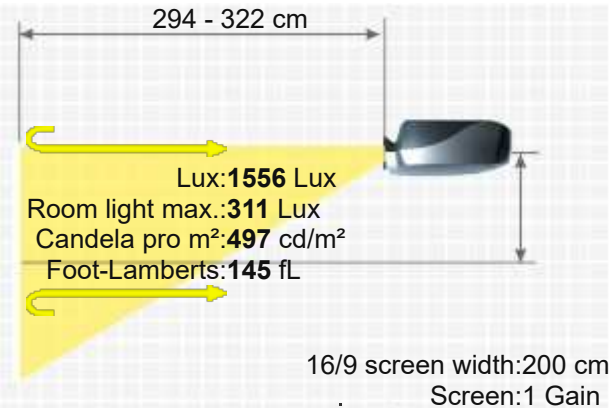

Size WxHxD	313 x 110,7 x 240 mm (12,3"x4,3"x9,4") 8,26 L/dm³	Key: 247 cm
Operating Noise	31 / 24 dB in Eco Mode	
Weight	2,80 kg / 4,41 lbs.	
Keystone	Vert.: +/-40° automatisch	Without offset
Illumination	-	
Frequenz	H-sync: 15-100 kHz V-sync: 24-120 Hz	Key: 247 cm
Foot-Lamberts	145 fL / max. 601 cm screen width 497 cd/m²	
Features	Real Full HD 3D Full HD 1080P compatible Eco Mode Automatic and manual vertical keystone correction	
Screen Mirroring	Optional only Chromecast / Fire TV / Apple TV / Mi Box Ads	

Optional accessories

	Nackte Osram Lampe	NLMP24779	72,30 €
	Lampe Ruby	Ruby-LMP24779	116,10 €
	Lampe Original	MC.JQ011.003	300,02 €
	Kompatible Lampe	LMP-K24392	84,47 €
	Fernbedienung mit Laserpointer	MC.JMV11.00G	28,86 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status2018 Discontinued (EOL) // Last update of the data: 2026-06-08
Created: 2019-12-10 10:32:41

Data

More Details



HCinema

<https://www.projector-database.com/pro/acerh6521abd-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.