

Acer PD2325W

ACER PD2325W



Brief Introduction

Beta 2.5

The Acer PD2325W 3D DLP projector has 2200 Ansi lumens, a contrast of 2000000:1 and a WXGA 1280 x 800 resolution. An image width of up to 477 cm is possible as the projector has 2200 Ansi lumens. However, if room light is available, the picture should be max. 318 cm wide. The model is also Full HD 1080P and 3D compatible. The model was built by Acer in 2022 and is no longer current.

Display Type

1 x DLP Chip
WXGA 16/10 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 2200 / 1320 ECO Screen 880 Lux (200 cm Screen width)

Contrast

Projector 2000000:1 full on/off Screen 2000000:1 full on/off

Black Level

Projector 0,0011 min. Lumen Screen 0 min. Lumen

Offset

-

Resolution

WXGA 1280 x 800
1.024.000 Pixel
WUXGA 1920 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

LED 140W

Light Life

-

Operating Costs

0,00 € LED

Focus

Manual

Zoom

Manual 1,1

Objective

F=2,55-2,68 f=22,00-24,10 mm

Throw Ratio


1,55-1,70:1

Audio

1 x 5W Mono

Connections

HDMI in
Mini Jack Audio in und out
USB in
RS232C Din 9 pin in

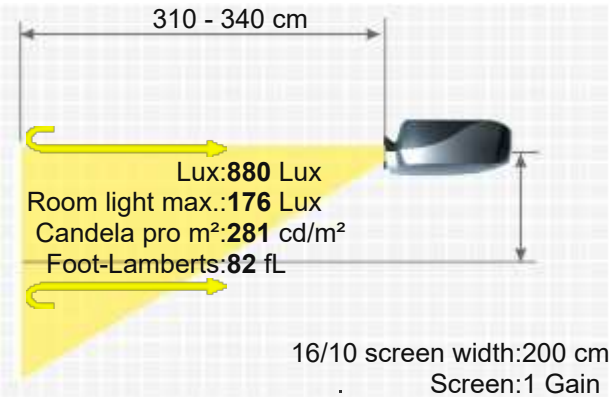



Ceiling Mounting	Yes, is possible.
Power	140W
Size WxHxD	-
Operating Noise	-

Key: 260 cm

Weight	2,60 kg / 4,41 lbs.
Keystone	Vert.: +/-40°
Illumination	-

Without offset

Frequenz	H-sync: 15-100 kHz V-sync: 24-120 Hz
----------	---

Key: 260 cm

Foot-Lamberts	82 fL / max. 477 cm screen width 281 cd/m²
---------------	---

Features	■ Real Full HD 3D ■ Full HD 1080P compatible ■ Eco Mode
----------	--

Screen Mirroring	Optional only Chromecast / Fire TV / Apple TV / Mi Box Ads
------------------	--

Optional accessories

	Fernbedienung mit Laserpointer	MC.JMV11.00G	28,86 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status	2022 Discontinued (EOL) // Last update of the data: 2025-12-22
--------	--



More Details

HCinema

<https://www.projector-database.com/pro/acerpd2325w-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.