3T 707 2



Bild im Bild | Pointer

Brief Introduction Beta 2.5	With the 707 2, manufacturer 3T offers a standard portable LCD projector with XGA 1024 x 768 resolution and a contrast of 450:1. The horizontal and vertical keystone correction provides leeway when setting up. A picture width of up to 408 cm is possible. However, the picture should be smaller in room light. We recommend max. 272 cm. The projector is no longer sold by the manufacturer.
Display Type	3 x 0,9" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Ansi-Lumen	Projector: 2200 / Screen: 712 Lux (bei 203 cm Screen)
Contrast	Projector: 450:1 full on/off / Screen: 450:1 full on/off
Black Level	Projector: 4,8889 min. Lumen / Screen: 1.593 min. Lumen
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel
Video Modes	PAL, SECAM
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	200W Lamp
Light Life	-
Operating Costs	-
Focus	Manual
Zoom	Manual 1,3
Objective	F=1,7-2,0 f=34-43 mm
Throw Ratio	1,86-2,35:1
Audio	-
Connections	DVI D-sub 15pin in YUV in Cinch Video in Cinch Stereo in S-Video in Mini Jack RS232C
Ceiling Mounting	Yes
Power	-
Size WxHxD	348 x 110 x 267 mm (13,7"x4,3"x10,5") 10,22 L/dm³
Operating Noise	35dB
Weight	3,50 kg / 7,72 lbs.
Keystone	Vert.: +/-40° Hori.: +/-15°
Illumination	90%
Frequenz	H-sync: 15-69 kHz V-sync: 43-85 Hz

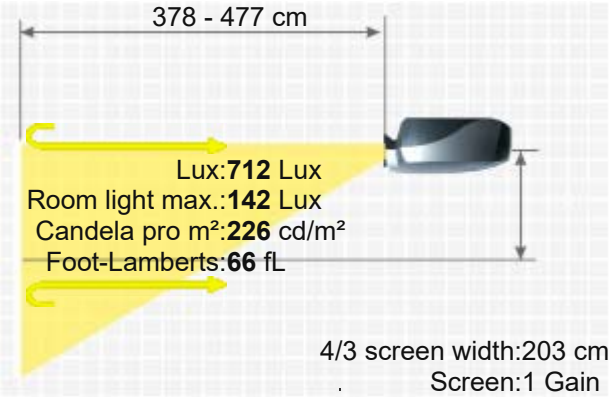

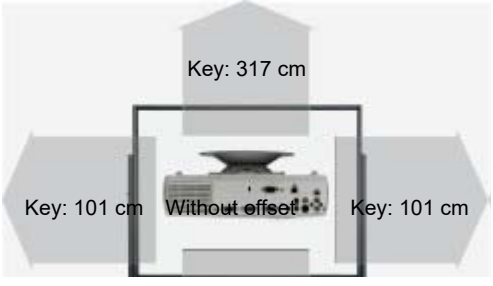



Foot-Lamberts	66 fL / max. 408 cm screen width
	226 cd/m²
Features	■ Picture-in-Picture ■ Remote control with laser pointer
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

https://www.projector-database.com/pro/3T7072-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.