
ACTO LX236



3LCD Netzwerk

Brief Introduction Beta 2.5	The ACTO model LX236 is an LCD projector with XGA 1024 x 768 resolution and a contrast of 3200:1. Thanks to the brightness of 4000 Ansi lumens, an image width of 551 cm is possible. The projector can also handle slightly brighter rooms with a smaller picture width (we recommend a maximum of 367 cm). The model is also Full HD 1080P compatible. The model was built by ACTO in 2012 and is no longer current.
Display Type	3 x 0,63" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Ansi-Lumen	Projector: 4000 / Screen: 1333 Lux (bei 200 cm Screen)
Contrast	Projector: 3200:1 full on/off / Screen: 3200:1 full on/off
Black Level	Projector: 1,2500 min. Lumen / Screen: 0,417 min. Lumen
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	230W USHIO Lamp
Light Life	3000 h. 4000 h. in eco Mode
Operating Costs	-
Focus	-
Zoom	Manual 1,2
Objective	F=2,3-2,5 f=18,82-22,60 mm
Throw Ratio	1,47-1,77:1
Audio	2 x 3W
Connections	HDMI in D-sub 15pin in und out Cinch Video in Cinch Stereo in S-Video in Mini Jack Audio in und out RS232C Din 9 pin in RJ45 in
Ceiling Mounting	Yes
Power	280W
Size WxHxD	327 x 87 x 241 mm (12,9"x3,4"x9,5") 6,86 L/dm³
Operating Noise	34 / 29 dB in Eco Mode
Weight	2,90 kg / 6,39 lbs.
Keystone	-
Illumination	85%
Frequenz	H-sync: 15-100 kHz V-sync: 48-100 Hz

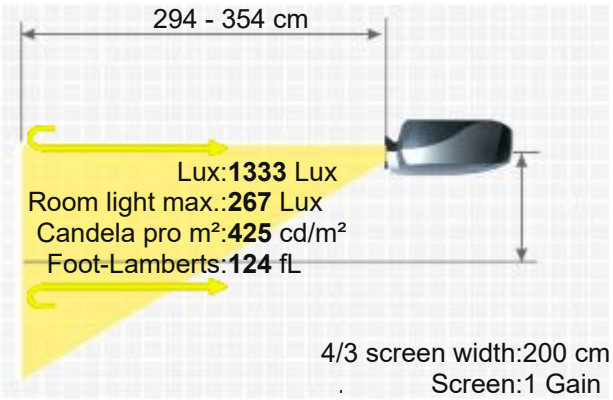

ACTO LX236

Foot-Lamberts	124 fL / max. 551 cm screen width
	425 cd/m²
Features	■ Full HD 1080P compatible ■ Eco Mode ■ Lan network compatible.
Status Data	2012 Discontinued (EOL) // Last update of the data: 2023-08-04
More Details	https://www.projector-database.com/pro/actolx236-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.