

ASK Proxima C431



ASK PROXIMA C431



Brief Introduction

Beta 2.5

A brief introduction to the C431: The ASK Proxima standard portable LCD projector offers 3700 Ansi lumens, a contrast of 8000:1 and an XGA 1024 x 768 resolution. The manufacturer specifies a lamp life of 4000 hours, which is over 5.5 years with a daily viewing time of 2 hours. A built-in horizontal and vertical keystone correction provides freedom when positioning the projector. An image width of up to 530 cm is possible, if the image width is smaller (we recommend max. 353 cm), rooms with residual light are also no problem. In the event that the image is still too small, the projector offers integrated edge blending software, with which several projectors can project a large image together. The model was built by ASK Proxima in 2014 and is no longer current.

Display Type



3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

Projector 3700

Screen 1233 Lux (bei 200 cm Screen)

Contrast

8000:1 full on/off

8000:1 full on/off

Black Level

0,4625 min. Lumen

0,154 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

235W Lamp

Articel Nr.: APU-L4

Light Life

4000 h. 6000 h. in eco Mode

Operating Costs

16,67% / 0,07 €

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,6-1,76 f=19,159-23,018 mm

Throw Ratio

1,5-1,8:1

Audio

10W

Connections

HDMI in

2 x D-sub 15pin in 1 x out

Cinch Video in

S-Video in

Mini Jack Audio in und out

USB in

RS232C Din 9 pin in

RJ45 in

Ceiling Mounting

Yes

Power

300W

Size WxHxD


-

Operating Noise

-

Weight

4,85 kg / 10,69 lbs.

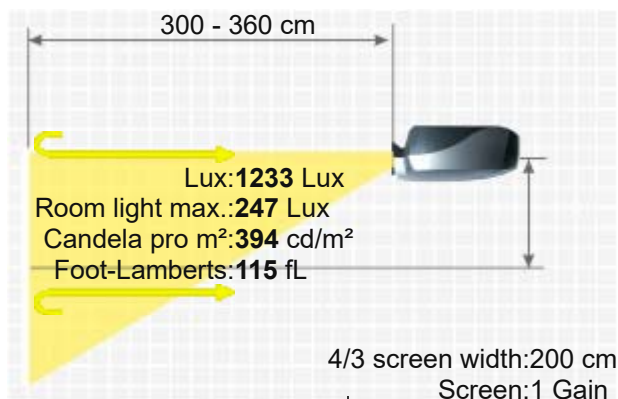

Keystone	Vert.: +/-30°
Illumination	Hori.: +/-15° 80%
Frequenz	H-sync: 15-100 kHz V-sync: 48-85 Hz
Foot-Lamberts	115 fL / max. 530 cm screen width 394 cd/m²
Features	■ User logo ■ Eco Mode ■ Kensington Slot ■ Edge Blending ■ Lan network compatible.
Status	2014 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	Created: 2014-08-20 14:09:38



More Details



HCinema

<https://www.projector-database.com/pro/askproximac431-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.