

ASK Proxima C445

ASK PROXIMA C445



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

The ASK Proxima C445 LCD projector has 3500 Ansi lumens, a contrast of 1000:1 and an XGA 1024 x 768 resolution. With the lens shift function, the projector can be positioned very freely. 515 cm image width, the projector will be able to illuminate well. Rooms with residual light can be created by the projector with a smaller image width, max. 343 cm is recommended here. The model was built by ASK Proxima in 2006 and is no longer current.



3 x 0,7" LCD TFT Panel mit MLA

XGA 4/3 Liquid Crystal Display with Micro Lense Array

3500

1000:1 full on/off

3,5000 min. Lumen

Vert.: +40% -0%

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

285W UHP Lamp

Articel Nr.: SP-LAMP-027

2000 h.

-

Manual

Manual 1,2

F=1,7-2,1 f=24-30 mm

1,5-1,8:1

2 x 3W


DVI in
D-sub 15pin in und out
YUV in
S-Video in
Cinch Video in
2 x Cinch Stero in
RS232C Din9pin
RJ45
Mini jack in und out
Remote in

Screen

1167 Lux (bei 200 cm Screen)

1000:1 full on/off

1,171 min. Lumen

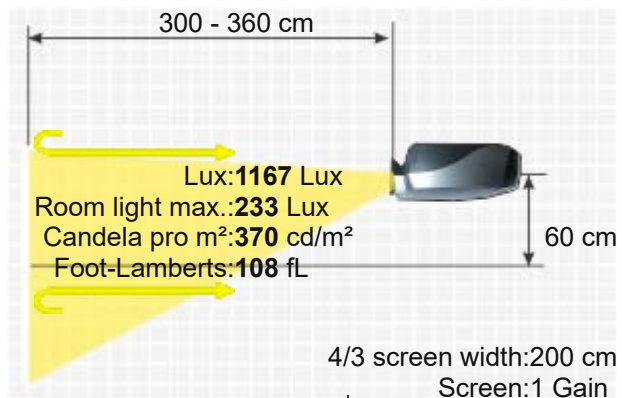



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
400W
419 x 130 x 315 mm (16,5"x5,1"x12,4") 17,16 L/dm³
32dB

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

6,00 kg / 13,23 lbs.
Vert.: +/-40°
Hori.: +/-20°
95%
H-sync: 15-91 kHz
V-sync: 50-120 Hz
Range max.: 140 MHz
108 fL / max. 515 cm screen width
370 cd/m²

- Lens shift Funktion
- Freeze
- Blank (Black screen button)
- Kensington Slot
- Control via web browser
- Lan network compatible.
- Overscan adjustable

Features

Please note

Ratioangabe im Prospekt stimmt nicht.

Bulb only

NLMP15457

Lamp ruby

Ruby-LMP15457

Lamp incl. air filter original

SP-LAMP-027

Compatible lamp

LMP-K15457

Universal Remote original

Fernb-uni-V3


Air filter original

MU03642

Ceiling Mount 100-120

Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n15645>

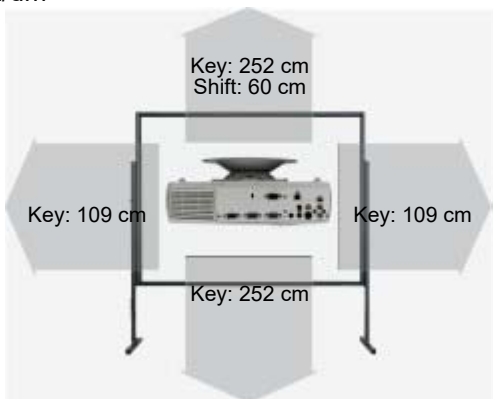

Optional

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Lens 040	3.9-7.4:1	7.8-14.8 m	50%		Manual
Lens 039	1.9-3.9:1	3.8-7.8 m	50%		Manual
Lens 038	1.2-2:1	2.4-4 m	50%		Manual
Fix Optional Lenses					
Lens 037	0.8:1	1.6 m	0.0% Fix		No Zoom

Status 2006 Discontinued (EOL) // Last update of the data: 2023-08-04



Data



More Details

Hcinema

<https://www.projector-database.com/pro/askproximac445-en.html>

