

ASK Proxima M6

ASK PROXIMA M6



Brief Introduction

Beta 2.5

The M6 DLP projector from ASK Proxima has 1800 Ansi lumens, a contrast of 1100:1 and an XGA 1024 x 768 resolution. Thanks to the brightness of 1800 Ansi lumens, a picture width of 369 cm is possible. In room light, the picture should be max. 246 cm wide. The model was built by ASK Proxima in 2007 and is no longer current, but is still very popular in our projector database.

Display Type



1 x 0,7" DDR DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

1800

582 Lux (bei 203 cm Screen)

Contrast

1100:1 full on/off

1100:1 full on/off

Black Level

1,6364 min. Lumen

0.531 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

SXGA 1280x1024 compressed

Application

Pal, Pal-M, Pal-N, Pal-60, SECAM, NTSC, HDTV 720p, 1080i,

Micro-Portabel | Small mobile presentations..

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

120W UHP Lamp

Light Life

Articel Nr.: SP-LAMP-003

3000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,27

Objective

F=2,0-2,2 f=26-33 mm

Throw Ratio

1,85-2,35:1

Audio

1W Mono

Connections

1 S-video
1 Cinch Viseo
1 M1 DA (DVI)



Ceiling Mounting

Nein

Power


155W

Size WxHxD

198,1 x 63,5 x 154,9 mm (7,8"x2,5"x6,1") 1,92 L/dm³

Operating Noise

32dB

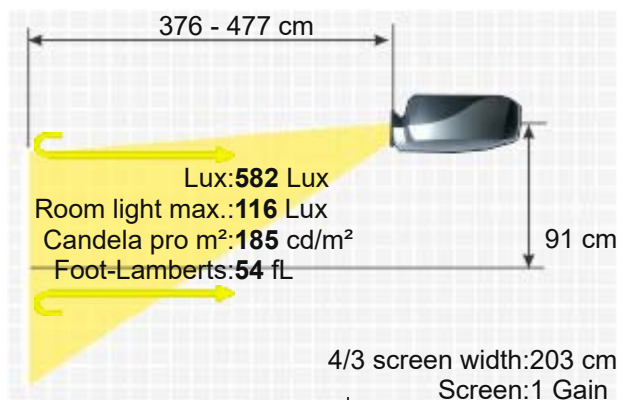

Key: 192 cm

Weight 1,10 kg / 2,43 lbs.
 Keystone Vert.: +/-15°
 Illumination 80%
 Frequenz H-sync: 15-100 kHz
 V-sync: 43,5-130 Hz
 Range max.: 135 MHz
 Foot-Lamberts 54 fL / max. 369 cm screen width
 185 cd/m²

- Features
- Freeze
 - Blank (Black screen button)
 - Eco Mode
 - Kensington Slot
 - Picture-in-Picture
 - Optional Wi-Fi network compatible.
 - Overscan adjustable

	Bulb only Philips	NLMP17342
	Bulb only Philips	NLMP17342
	Lamp ruby	Ruby-LMP17342
	Lamp ruby	Ruby-LMP17342
	Lamp original	SP-LAMP-033
Optional	Lamp original	SP-LAMP-033
	Compatible lamp	LMP-K17342
	Compatible lamp	LMP-K17342
	Universal Remote original	Fernb-uni-V3
	Ceiling Mount 100-120	Halterung100

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n17343>
 2007 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/askproximam6-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

