

# Benq W1070+W

BENQ W1070+W



With the W1070+W, manufacturer Benq offers a DLP projector with HDTV 1920 x 1080 resolution and a contrast of 10000:1. The built-in lens shift and keystone correction function provides freedom when setting up. Thanks to the brightness of 2200 Ansi lumens, a picture width of 477 cm is possible. In room light, the picture should be max. 318 cm wide. A smartphone with MHL connection can be connected directly to the MHL/HDMI port and transmit a 1080p / 60 Hz image mirroring (screen mirroring) while the smartphone is being charged at the same time. Even 1080P video signals and 3D are no problem for the projector. The model was built by Benq in 2014 and is no longer current, but is still very popular in our projector database.

## Brief Introduction

Beta 2.5

## Display Type



1 x DLP Chip  
HDTV 16/9 Ti Digital Light Processing Chip

## Ansi-Lumen

Projector 2200

Screen 978 Lux (bei 200 cm Screen)

## Contrast

10000:1 full on/off

10000:1 full on/off

## Black Level

0,2200 min. Lumen

0,098 min. Lumen

## Lens shift

Vert.: +65% --55%

## Resolution

HDTV 1920 x 1080  
2.073.600 Pixel

## Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

## Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

## 3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom  
Frame Sequential (3D Ready)

## Application

Homecinema | Medium screen width or rooms with little light, max. 100 lumens.

## Light Source

240W Lamp

## Light Life

Articel Nr.: 5J.J9H05.001

3500 h. 6000 in Eco Mode

## Operating Costs

9,59% / 0,07 €

## Focus

Manual

## Zoom

Manual 1,3

## Objective

F=2,59-2,87 f=16,88-21,88 mm

## Throw Ratio


1,15-1,50:1

## Audio

10W

## Connections

HDMI mit MHL  
D-sub 15 pin in  
YUV in  
S-Video in  
Cinch Video in  
Cinch Stereo in

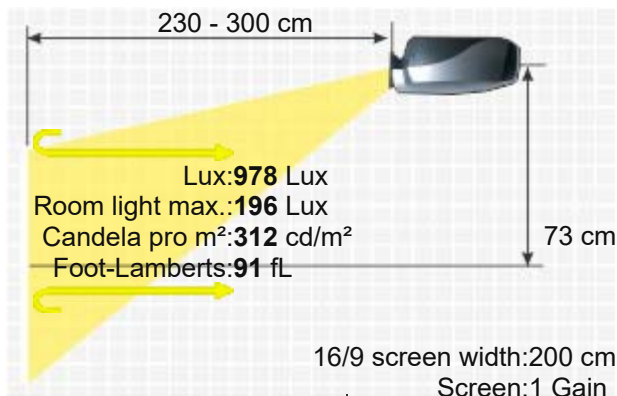

Mini Jack Audio in  
USB Typ B  
RS232C Din 9 pin in  
12V Trigger out

Yes

375W

311,81 x 104,07 x 244,12 mm (12,2"x4,1"x9,6") 7,89 L/dm³

35 / 30 dB in Eco Mode

Ceiling Mounting  
Power  
Size WxHxD  
Operating Noise

Weight  
Keystone  
Illumination

2,65 kg / 4,41 lbs.

Vert.: +/-20°

-

Frequenz

H-sync: 15-102 kHz

V-sync: 23-120 Hz

Foot-Lamberts

91 fL / max. 477 cm screen width

312 cd/m²

■ Real Full HD 3D

■ Full HD 1080P compatible

■ Lens shift Funktion

■ Eco Mode

■ Kensington Slot

■ BrilliantColor™

■ 2 x digital zoom

■ 3-D colour management

Features

Remote control original

5J.J9M06.001 / RCV012

Optional

Lamp original

5J.J9H05.001


Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro23473>

2014 Discontinued (EOL) // Last update of the data: 2023-10-27

Created: 2014-07-08 13:21:10

Status

Data

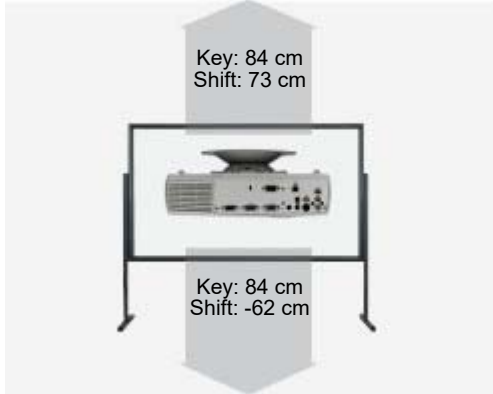

More Details

# HCinema

<https://www.projector-database.com/pro/benqw1070plusw-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.