

DreamVision INTI+ 1



DREAMVISION INTI+ 1



Brief Introduction

Beta 2.5

The INTI+ 1 3D DILA has 1300 Ansi lumens, a contrast of 50000:1 and an HDTV 1920 x 1080 resolution. The integrated lens shift gives you freedom when positioning the projector. The projector can illuminate an image width of up to 366 cm thanks to the 1300 Ansi lumens. In room lighting, however, the image width should ideally be less than 244 cm. The projector can also display 1080P and 3D without any problems. With an operating noise of just 19 decibels, the model is very quiet compared to others. The model was built by DreamVision in 2012 and is no longer current.

Display Type



3 x 0,7" DILA Chip

HDTV 16/9 Direct-Drive Image Light Amplification (D-ILA)

Ansi-Lumen

1300

578 Lux (bei 200 cm Screen)

Contrast

50000:1 full on/off

50000:1 full on/off

Black Level

0,0260 min. Lumen

0,012 min. Lumen

Lens shift

Vert.: +/-80% Hori.: +/-34%

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Application

High-End Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

220W UHP Lamp

Article Nr.: R8760003

Light Life

3000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 2

Objective

-

Throw Ratio

1,4-2,8:1

Audio

Nein

Connections

2 x HDMI 1.4a

YUV in

RS232C

12V Trigger out

Ceiling Mounting

Yes, is possible.

Power


-

Size WxHxD

505 x 215 x 455 mm (19,9"x8,5"x17,9") 49,4 L/dm³

Operating Noise

19dB

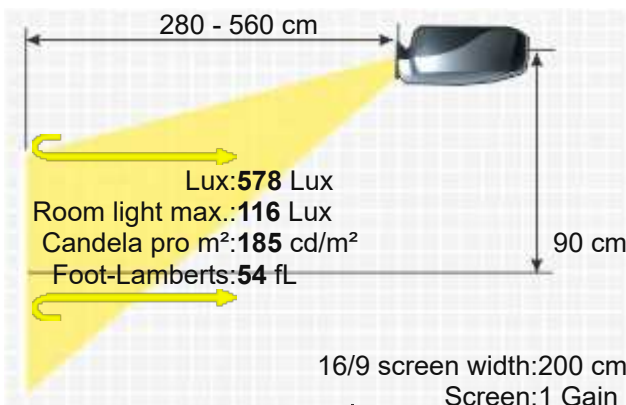

Weight

15,00 kg / 33,07 lbs.

Keystone

-

Illumination

-

Frequenz	-
Foot-Lamberts	54 fL / max. 366 cm screen width
	185 cd/m²
Features	■ Real Full HD 3D ■ Full HD 1080P compatible ■ Lens shift Funktion
Screen Mirroring	-



Optional accessories

	Nackte Philips Lampe	NLMP22510	124,05 €
	Lampe Ruby	Ruby-LMP22510	128,48 €
	Lampe Original	R8760003	EOL €
	Kompatible Lampe	LMP-K22508	50,94 €
	Deckenhalterung Länge 225 mm	Halterung45	85,80 €

Status Data 2012 Discontinued (EOL) // Last update of the data: 2025-03-03

More Details



HCinema

<https://www.projector-database.com/pro/dreamvisionintiplus1-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.