

Sonnoc LU7500

S O N N O C L U 7 5 0 0



The Sonnoc LU7500 laser DLP projector has 7500 Ansi lumens, a contrast of 100000:1 and a WUXGA 1920 x 1200 resolution. The service life is 20000 hours due to the laser, which is over 13.7 years with a daily viewing time of 4 hours. With the lens shift function, the projector can be positioned very freely. An image width of up to 880 cm is possible, if the image width is smaller (we recommend max. 587 cm), rooms with residual light are also no problem. Even 1080P video signals are no problem for the projector.



1 x 0,67" DMD DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Projector

7500

100000:1

0,0750 min. Lumen

Vert.: +/-50% Hori.: +/-15%

WUXGA 1920 x 1200

2.304.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

RgB Dual Color Laser (red & blue)

20000 h. /25000 h. ECO

0,00 € Laser

Powered

Powered

optional

optional

-

HDMI in
HDBaseT
3D-Sync
DVI in
D-sub 15pin in und out
Mini USB in
RS232C Din 9 pin in
RJ45 in
Wired Remote 3,5mm

Screen

3333 Lux (bei 200 cm Screen)

100000:1

0,033 min. Lumen





Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
575W
484 x 178 x 519 mm (19,1"x7"x20,4") 44,71 L/dm³
38 / 36 dB in Eco Mode

Weight
Keystone
Illumination

23,00 kg / 50,71 lbs.
Vert.: +/-20°
Hori.: +/-20°

Frequency


-

Foot-Lamberts

310 fL / max. 880 cm screen width
1062 cd/m²

Features

- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Lan network compatible.

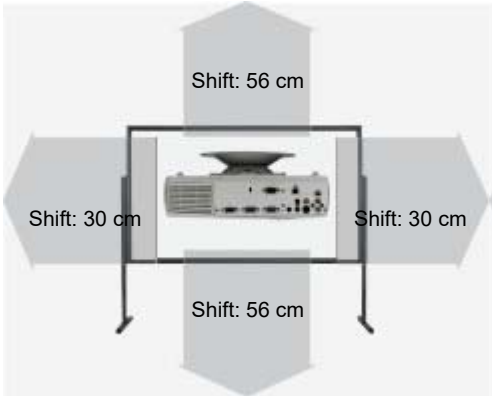

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
A15	0.75-0.95:1	1.5-1.9 m			Powered
A13	2.9-5.5:1	5.8-11 m			Powered
A06	1.22-1.53:1	2.4-3.1 m			Powered
A03	1.52-2.92:1	3-5.8 m			Powered
A01	0.95-1.22:1	1.9-2.4 m			Powered

Status

2021 Current model // Last update of the data: 2024-10-02

Data



More Details



HCinema

<https://www.projector-database.com/pro/Sonnoclu7500-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.