
ACTO AT X8450



Brief Introduction Beta 2.5	A brief introduction to the ACTO AT X8450. The standard portable LCD projector has an XGA 1024 x 768 resolution and a contrast of 600:1. 4500 Ansi lumens ensure that an image width of 584 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 389 cm. The model built in 2009 is no longer offered by ACTO.
Display Type	3 x 0,8" LCD TFT Panel mit MLA XGA 4/3 Liquid Crystal Display with Micro Lense Array
Ansi-Lumen	Projector: 4500 / Screen: 1500 Lux (bei 200 cm Screen)
Contrast	Projector: 600:1 full on/off / Screen: 600:1 full on/off
Black Level	Projector: 7,5000 min. Lumen / Screen: 2,513 min. Lumen
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	275W Lamp
Light Life	-
Operating Costs	-
Focus	Manual
Zoom	Manual
Objective	F=1,7-1,9
Throw Ratio	-
Audio	8W Mono
Connections	DVI-I in D-sub 15 pin in und out S-Video in Cinch Video inUSB Typ B RS232C Din 9 pin in
Ceiling Mounting	Yes
Power	380W
Size WxHxD	333 x 113 x 272 mm (13,1"x4,4"x10,7") 10,24 L/dm³
Operating Noise	33 / 30 dB in Eco Mode
Weight	7,00 kg / 15,43 lbs.
Keystone	Vert.: +/-30°
Illumination	85%
Frequenz	H-sync: 15-100 kHz V-sync: 50-100 Hz Range max.: 140 MHz
Foot-Lamberts	139 fL / max. 584 cm screen width 476 cd/m²

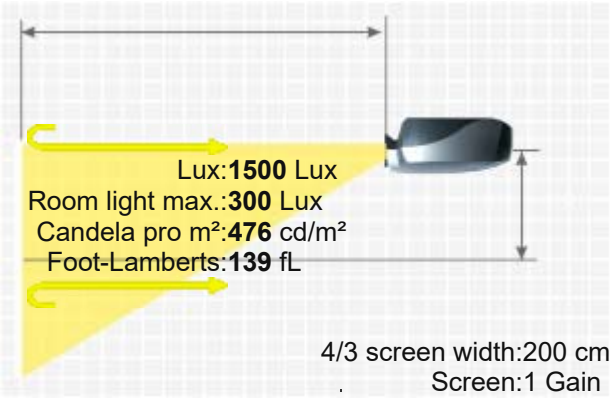

Features	■ Eco Mode ■ Optional LAN network compatible.
Status Data	2009 Discontinued (EOL) // Last update of the data: 2023-08-04
More Details	HCinema https://www.projector-database.com/pro/actoatx8450-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.