

Epson EB-675Wi

EPSON EB-675Wi



The Epson EB-675Wi LCD whiteboard projector has 3200 Ansi lumens, a contrast of 14000:1 and a WXGA 1280 x 800 resolution. The lamp in the projector is specified with a lamp life of 10000 hours, which is over 13.7 years if enjoyed for two hours every day. The horizontal and vertical keystone correction provides leeway when setting up. The projector is equipped with a microphone jack plug and 16W speakers, so no additional speakers are required for presentations or training sessions. Thanks to the brightness of 3200 Ansi lumens, a picture width of 575 cm is possible. In room light, the picture should be max. 383 cm wide. The projector offers an interactive whiteboard function for interactive training courses and presentations. With the HDMI MHL port, the smartphone image can be transmitted to the projector in Full HD at 60 Hz by screen mirroring and the smartphone is charged at the same time. The model was built by Epson in 2017 and is no longer current, but is still very popular in our projector database.



3 x 0,59" D9 LCD TFT Panel mit MLA

WXGA 16/10 Liquid Crystal Display with Micro Lense Array

| | | | |
|--------------------|-------------------------|--------|------------------------------|
| Projector | 3200 / 1800 im Eco Mode | Screen | 1280 Lux (bei 200 cm Screen) |
| Contrast | 14000:1 full on/off | | 14000:1 full on/off |
| Black Level Offset | 0,2286 min. Lumen | | 0,091 min. Lumen |

WXGA 1280 x 800

1.024.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Whiteboard | Training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

215W Lamp

Articel Nr.: ELPLP90

5000 h. 10000 h. in Eco Mode

-


Manual

No Zoom

F=1,6 f=3,76mm

0,28:1

16W

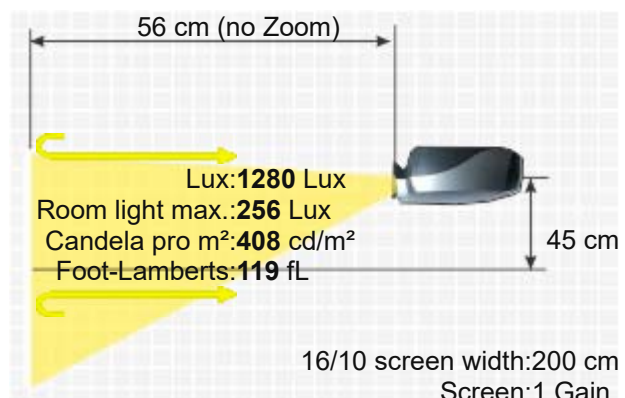

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

3 x HDMI mit MHL in
2 x D-sub 15pin in und out
USB Typ A,B
RS232C Din 9 pin in
Mini Jack Audio in und out
RJ45 in
Mikrofon in

Connections




Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
311 / 226W in Eco Mode
367 x 149 x 400 mm (14,4"x5,9"x15,7") 21,87 L/dm³
35 / 28 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz

5,90 kg / 13,01 lbs.
Vert.: +/-3°
Hori.: +/-3°
-

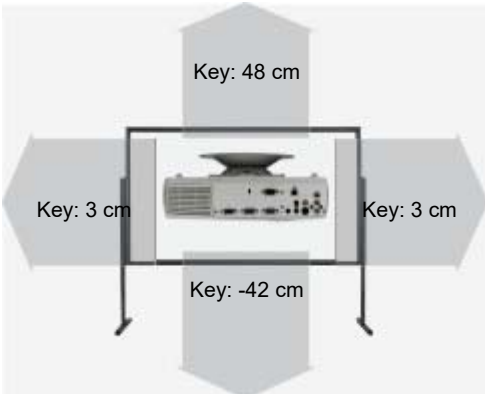

Foot-Lamberts

119 fL / max. 575 cm screen width
408 cd/m²

Features

- User logo
- Eco Mode
- Kensington Slot
- sRGB
- Password protection
- Optional Wi-Fi network compatible.
- Lan network compatible.
- Short-throw projector
- Crestron®-Software compatible.
- Digital Zoom
- Whiteboard function.

Optional

| | |
|-----------------------------------|-----------------------|
| Air filter original | V13H134A49 / ELPAF49 |
| Interactive Pen original | V12H776010 / ELPPS04 |
| Interactive Pen original | V12H775010 / ELPPS03 |
| Interaktitive pen blue original | V12H774010 / ELPPN05B |
| Interaktitive pen orange original | V12H773010 / ELPPN05A |
| Lamp original | ELPLP90 / V13H010L90 |
| Remote control original | 2173589 |

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fi24098>
2017 Discontinued (EOL) // Last update of the data: 2023-09-20
Created: 2017-01-06 09:46:29

Data





HCinema

<https://www.projector-database.com/pro/epsoneb675wi-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.