


Epson EB-685WS

EPSON EB-685WS



The short-throw EB-685WS LCD has 3500 Ansi lumens, a contrast of 14000:1 and a WXGA 1280 x 800 resolution. The lamp in the projector is specified with a lamp life of 10000 hours, which is over 13.7 years if enjoyed for two hours every day. The projector also offers an integrated media player that can be used to play files directly. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. Thanks to the short-throw projection ratio of just 0.28:1, the projector is also not disruptive in the room. For a 2m wide image, the projector only needs to be 56 cm away from the screen. The model offers a microphone jack plug and 16W speakers, so no additional audio devices are required for presentations or training courses. The HDMI MHL (Mobile High-Definition Link) port enables 1080p / 60 Hz image mirroring (screen mirroring) to be transmitted from the smartphone while it is being charged at the same time via the connection. The model was built by Epson in 2017 and is no longer current.

 3 x 0,59" D9 LCD TFT Panel mit MLA
WXGA 16/10 Liquid Crystal Display with Micro Lense Array

3500 / 2900 im Eco Mode	1400 Lux (bei 200 cm Screen)
14000:1 full on/off	14000:1 full on/off
0,2500 min. Lumen	0,1 min. Lumen

WXGA 1280 x 800
1.024.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Media player formats: .jpg .bmp .gif .png .avi (Motion- JPEG)

DVD | HD Blu-ray (komprimiert) | 3D-Blu-ray | 4K-UHD-Blu-ray

Short Distance | Medium screen width or rooms with a little more ambient light, max. 200 lumens.

250W Lamp

Articel Nr.: ELPLP91 / V13H010L91

5000 h. 10000 h. in Eco Mode

-

Manual

No Zoom

F=1,6 f=3,76mm

0,28:1


16W

3 x HDMI mit MHL in
2 x D-sub 15pin in und out
USB Typ A,B
RS232C Din 9 pin in
Mini Jack Audio in und out
RJ45 in
Mikrofon in

Yes

354 / 310W ImEco Mode

367 x 149 x 400 mm (14,4"x5,9"x15,7") 21,87 L/dm³

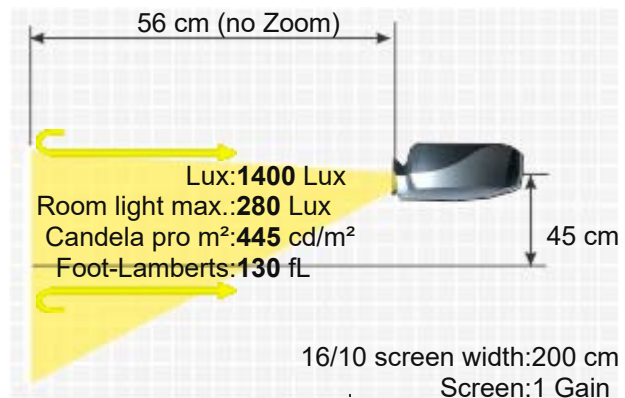

Operating Noise 35 / 28 dB in Eco Mode

Weight 5,70 kg / 11,02 lbs.
Keystone Vert.: +/-3°
Hori.: +/-3°

Illumination -

Frequenz -

Foot-Lamberts 130 fL / max. 601 cm screen width
445 cd/m²

- Features
- Integrated Mediaplayer
 - User logo
 - Eco Mode
 - Kensington Slot
 - sRGB
 - Password protection
 - Optional Wi-Fi network compatible.
 - Lan network compatible.
 - Short-throw projector
 - Crestron®-Software compatible.
 - Digital Zoom
 - Compatible with SMART boards.

Optional

Air filter original	V13H134A49 / ELPAF49
Lamp original	ELPLP91 / V13H010L91
Remote control original	2173589

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fi9001233>
2017 Discontinued (EOL) // Last update of the data: 2023-09-20
Created: 2017-01-06 09:48:10


Data

More Details



HCinema

<https://www.projector-database.com/pro/epsoneb685ws-en.html>

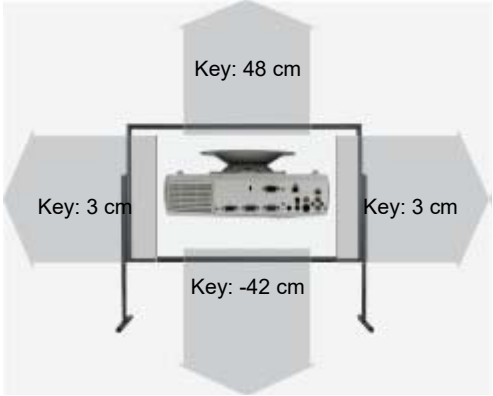

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.