

Epson EB 925/LW

EPSON EB 925/LW



Brief Introduction

Beta 2.5

The standard portable EB 925/LW LCD projector from Epson has 3500 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. The lamp in the projector is specified with a lamp life of 4000 hours, which converts to over 5.5 years at 2 hours per day. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. 3500 Ansi lumens ensure that a picture width of 515 cm is also possible. The projector manages rooms with residual light with a smaller image width, we recommend a maximum of 343 cm. Even 1080P video signals are no problem for the projector. The model was built by Epson in 2011 and is no longer current.

3 x 0,63" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

3500 / 2450 im Eco Mode
2000:1 full on/off
1,7500 min. Lumen
1167 Lux (bei 200 cm Screen)
2000:1 full on/off
0,584 min. Lumen

Resolution

XGA 1024 x 768
786.432 Pixel
HDTV 1920 x 1080 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Standard-Portabel | External training and company presentations, as well as product presentations.

Application

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

230W UHE Lamp
Articel Nr.: ELPLP61 / V13H010L61

Light Life

4000 h. 6000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,62

Objective

F=1,51-1,99 f=18,2-29,2 mm

Throw Ratio

1,38-2,24:1

Audio

1 x 16W

Connections

HDMI in
2 x D-sub 15 pin in 1 x out
S-Video in
Cinch Video in
USB Typ A, B
RJ45 in
Mini Jack Audio in und out
RS232C

Ceiling Mounting

Yes

Power

337 / 252W in Eco Mode

Size WxHxD


345 x 93 x 263 mm (13,6"x3,7"x10,4") 8,44 L/dm³

Operating Noise


37 / 29 dB in Eco Mode

Weight

3,40 kg / 7,5 lbs.

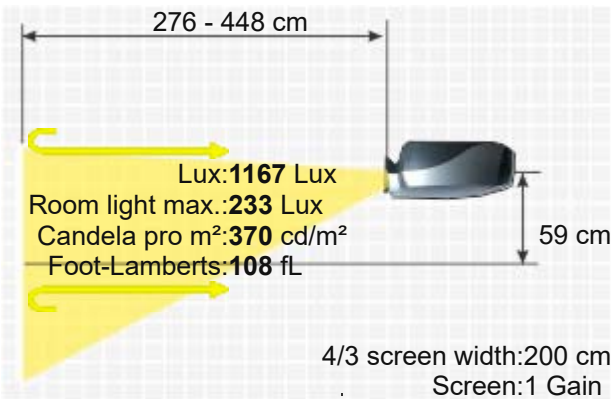

Keystone	Vert.: +/-30° automatisch
Illumination	Hori.: +/-30°
Frequenz	-
Foot-Lamberts	108 fL / max. 515 cm screen width 370 cd/m²
Features	<div> <div></div> Full HD 1080P compatible </div> <div> <div></div> Direkt Power Off </div> <div> <div></div> Eco Mode </div> <div> <div></div> Automatic and manual vertical keystone correction </div> <div> <div></div> Kensington Slot </div> <div> <div></div> Password protection </div> <div> <div></div> PJLink™ </div> <div> <div></div> Optional Wi-Fi network compatible. </div> <div> <div></div> Lan network compatible. </div>
	Lamp original
	Air filter original
	Remote control original
	Order here: https://www.hcinema.de/lampen/shop-en.php?id=20040
	2011 Discontinued (EOL) // Last update of the data: 2023-08-04
Status Data	

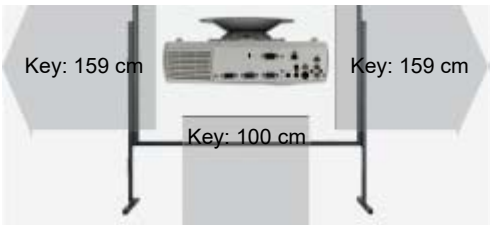

More Details



HCinema

<https://www.projector-database.com/pro/epsoneb925-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.