

Epson USA EX7240



EPSON
USA
EX7240



The standard portable EX7240 LCD has 3200 Ansi lumens, a contrast of 15000:1 and a WXGA 1280 x 800 resolution. The lamp has a service life of up to 5000 hours, which is over 6.8 years if enjoyed for two hours a day. Horizontal and vertical keystone correction makes setting up the picture childs play. The projector can illuminate a picture width of up to 575 cm thanks to its 3200 Ansi lumens. In room lighting, however, the image width should ideally be less than 383 cm. The model was built by Epson USA in 2015 and is no longer current.



3 x 0,59" LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

Projector	3200 / 2240 im Eco Mode	Screen	1280 Lux (bei 200 cm Screen)
Contrast	15000:1 full on/off		15000:1 full on/off
Black Level Offset	0,2133 min. Lumen		0,085 min. Lumen

Resolution
WXGA 1280 x 800
1.024.000 Pixel

Video Modes
Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Standard-Portabel | External training and company presentations, as well as product presentations.

Application
Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source
200W UHE Lamp
Articel Nr.: ELPLP88

Light Life
5000 h. 6000 h. in Eco Mode

Operating Costs
-

Focus
Manual

Zoom
Manual 1,2

Objective
F=1,58-1,72 f=16,9-20,28 mm

Throw Ratio
1,30-1,56:1

Audio
2W Mono

Connections
HDMI in
D-sub 15pin in
Cinch Video in
S-Video in
Cinch Stereo in
USB Typ A,B in
RS232C Din 9 pin in




Ceiling Mounting
Yes

Power
283 / 207W in Eco Mode

Size WxHxD
234 x 77 x 297 mm (9,2"x3"x11,7") 5,35 L/dm³

Operating Noise
37 / 28 dB in Eco Mode

Weight
2,40 kg / 5,29 lbs.

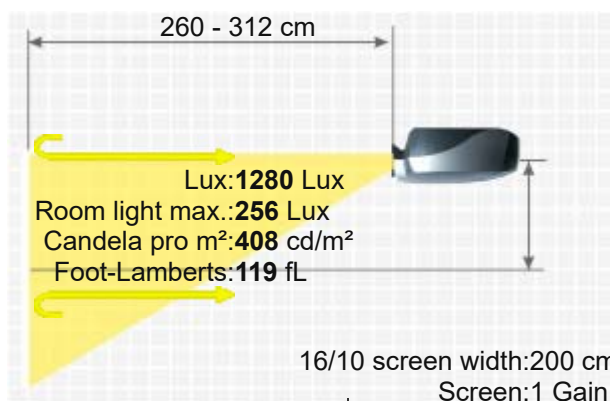

Keystone	Vert.: +/-30° automatisch	
Illumination	-	
Frequenz	-	
Foot-Lamberts	119 fL / max. 575 cm screen width 408 cd/m²	
Features	■ Eco Mode ■ Automatic and manual vertical keystone correction ■ Wi-Fi network compatible.	
Optional	Lamp original	ELPLP88 / V13H010L88
	Remote control original	1648806
Status	Order here: https://www.hcinema.de/lampen/shop-en.php?id=9000611 2015 Discontinued (EOL) // Last update of the data: 2023-08-04 Created: 2015-11-18 15:00:35	
Data		

More Details



HCinema

<https://www.projector-database.com/pro/epsonex7240-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.