

Formovie C3

FORMOVIE C3



Brief Introduction

Beta 2.5

The Formovie C3 short-throw 3D DLP projector has 2250 Ansi lumens, a contrast of 3000:1 and a UHD (4K2K) 3840 x 2160 resolution. The built-in ambient light sensor detects the ambient light in the room and automatically optimizes the image. This projector has a projection ratio of just 0.23:1. For a 2 m wide image, the projector only needs to be 46 cm away from the screen. The projector has Airplay and Miracast screen mirroring support, which enables direct playback of videos in high resolution and surround sound from smartphones, tablets and PCs with Android, Windows or iOS via Wi-Fi. Furthermore, the projector can play 1080P and 4K as well as 3D without any problems, meaning that all currently available Blu-ray formats can be recognized by the projector. The model was built by Formovie in 2023 and is no longer current, but is still a popular projector in our database.



1 x 0,47" DLP DMD Chip
HDTV 16/9 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

2250

Contrast

3000:1 full on/off

Black Level

0,7500 min. Lumen

Offset

-

Resolution

UHD (4K2K) 3840 x 2160
8.294.400 Pixel / FHD E-Shift

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, 3D, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Short Distance | Medium screen width or rooms with little light, max. 100 lumens.

Light Source

Laser

Light Life

-

Operating Costs

0,00 € Laser

Focus

Powered

Zoom

No Zoom

Objective

-

Throw Ratio

0,23:1


Audio

-

Connections

3x HDMI 2.1 (1xeARC) in
Mini Jack Audio out
2x USB in
S/PDIF

1000 Lux (bei 200 cm Screen)
3000:1 full on/off
0,334 min. Lumen

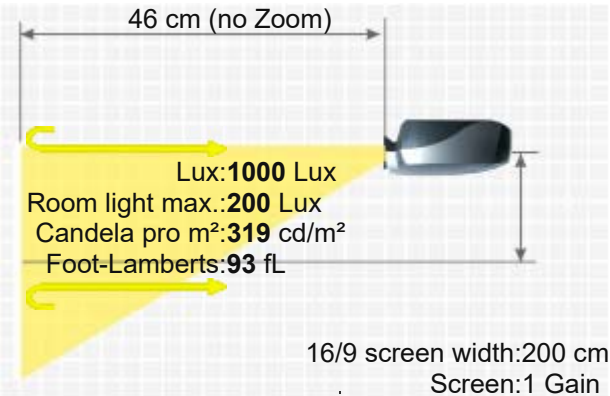

RJ45 in



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
300W
410 x 88 x 291 mm (16,1"x3,5"x11,5") 10,5 L/dm³
32dB

Weight
Keystone
Illumination

7,00 kg / 15,43 lbs.
-
-

Frequenz

-

Foot-Lamberts

93 fL / max. 482 cm screen width
319 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- High Dynamic Range (HDR)
- Wi-Fi network compatible.
- Lan network compatible.
- Short-throw projector
- Ambient Light Sensor.
- FengOS 3.0

Status

2023 Discontinued (EOL) // Last update of the data: 2024-09-23
Created: 2023-12-14 13:12:46

Data



More Details



HCinema

<https://www.projector-database.com/pro/formoviec3-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.