

Hitachi CP DW10N

HITACHI CP DW10N



A brief introduction to the CP DW10N: The Hitachi LCD projector offers 2000 Ansi lumens a contrast of 400:1 and a WXGA 1280 x 800 resolution. With a projection ratio of just 0.5:1, this projector never gets in the way. For a 2m wide image, the projector only needs to be 100 cm away from the screen. Furthermore, the projector can play 1080P without any problems. The model was built by Hitachi in 2009 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



3 x 0,59" LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

Ansi-Lumen

2000 / 1500 im Eco Mode

800 Lux (bei 200 cm Screen)

Contrast

400:1 full on/off

400:1 full on/off

Black Level

5,0000 min. Lumen

2,013 min. Lumen

Offset

Resolution

WXGA 1280 x 800

1.024.000 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D-Blu-ray | 4K-UHD-Blu-ray

Application

Short Distance | Medium screen width or rooms with little light, max. 100 lumens.

Light Source

180W UHB Lamp

Articel Nr.: DT01091

Light Life

3000 h. 4000 h. in eco Mode

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

-

Throw Ratio

0,5:1

Audio

10W

Connections

HDMI in

2 x D-sub 15 pin in 1 x out

S-Video in

Cinch Video in

Cinch Stereo in

RS232C Din 9 pin in

RJ45 in





Ceiling Mounting -
 Power 250W
 Size WxHxD 333 x 103 x 303 mm (13,1"x4,1"x11,9") 10,39 L/dm³
 Operating Noise 37 / 29 dB in Eco Mode

Weight 3,70 kg / 8,16 lbs.
 Keystone Vert.: +/-5°
 Illumination -


Frequenz H-sync: 15-106 kHz
 V-sync: 50-120 Hz

Foot-Lamberts 74 fL / max. 454 cm screen width
 254 cd/m²

- Features
- Full HD 1080P compatible
 - Freeze
 - Blank (Black screen button)
 - Blackboard Modus
 - User logo
 - Eco Mode
 - Kensington Slot
 - Gamma correction
 - Digital image shift
 - Password protection
 - Remote control with laser pointer
 - PJLink™
 - Lan network compatible.
 - Overscan adjustable
 - Short-throw projector
 - Digital zoom x 1.3

	Bulb only	NLMP19406
	Lamp ruby	Ruby-LMP19406
	Lamp incl. air filter original	DT01091 / CPD10LAMP
Optional	Compatible lamp	LMP-K19400
	Remote control original	HL02881- R016F / HL03032 - R017H / HL02483
	Air filter original	UX35971

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n19405>
 2009 Discontinued (EOL) // Last update of the data: 2023-08-04

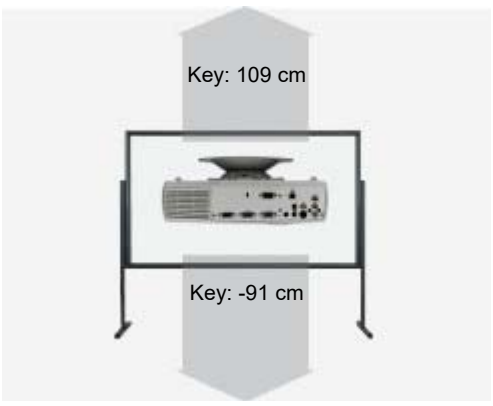

Data



More Details



HCinema

<https://www.projector-database.com/pro/hitachicpdw10n-en.html>

