Alphapro compact c1024



Brief Introduction Beta 2.5	The standard portable Alphapro compact c1024 LCD projector has 900 Ansi lumens, a contrast of 250:1 and an XGA 1024 x 768 resolution. An image width of up to 261 cm is possible. However, the image should be smaller in room light. We recommend max. 174 cm. This model is no longer offered by Alphapro.
Display Type	3 x 0,9" LCD psi TFT Panel XGA 4/3 Liquid Crystal Display
Ansi-Lumen	Projector: 900 / Screen: 291 Lux (bei 203 cm Screen)
Contrast	Projector: 250:1 full on/off / Screen: 250:1 full on/off
Black Level	Projector: 3,6000 min. Lumen / Screen: 1.178 min. Lumen
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel
Video Modes	NTSC, PAL, SECAM Pal 60 NTSC 4,43
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	120W UHP Lamp
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,32
Objective	F=2,0-2,3 f=38-50 mm
Throw Ratio	2,08-2,73:1
Audio	3W Stereo
Connections	Cinch Video in 3 x Audio Eingang 1 xAudio Ausgang D-sub 15pin in VGA Ausgang S Video Eingang RS232C Controuler Maus Port Eingang
Ceiling Mounting	Yes
Power	190W
Size WxHxD	341 x 225 x 122 mm (13,4"x8,9"x4,8") 9,36 L/dm³
Operating Noise	35dB
Weight	4,00 kg / 8,82 lbs.
Keystone	-
Illumination	90%
Frequenz	H-sync: 15-140 kHz V-sync: 45-180 Hz
Foot-Lamberts	27 fL / max. 261 cm screen width

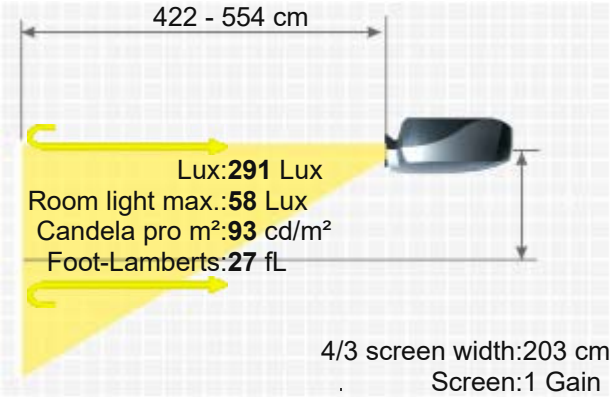

ALPHAPRO COMPACT C1024

	93 cd/m²
Features	■ Freeze ■ Remote control with laser pointer
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	
More Details	https://www.projector-database.com/pro/alphaprocompactc1024-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.