

Hitachi CP X3010

HITACHI CP X3010



CP-X2510

A brief introduction to the CP X3010: The Hitachi standard portable LCD projector offers 3000 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. Thanks to the brightness of 3000 Ansi lumens, a picture width of 477 cm is possible. In room light, the picture should be max. 318 cm wide. It is also Full HD 1080P compatible. The model was built by Hitachi in 2010 and is no longer current.

 3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

 1000 Lux (bei 200 cm Screen)
2000:1 full on/off
0,501 min. Lumen

Resolution XGA 1024 x 768
786.432 Pixel
UXGA 1600 x 1200 compressed
Video Modes PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p
Application Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source 210W UHP Lamp
Articel Nr.: CPX2010LAMP DT01021
Light Life 3000 h. 6000 h. in Eco Mode

Operating Costs -

Focus Manual


Zoom Manual 1,2

Objective f=19-23 mm

Throw Ratio 1,5-1,8:1

Audio 2 x 8W

Connections 2 x D-sub 15 pin in 1 x out
YUV in
S-Video in
Cinch Video in
Cinch Stereo in
Mini Jack Audio in
USB in
RS232C Din 9 pin in

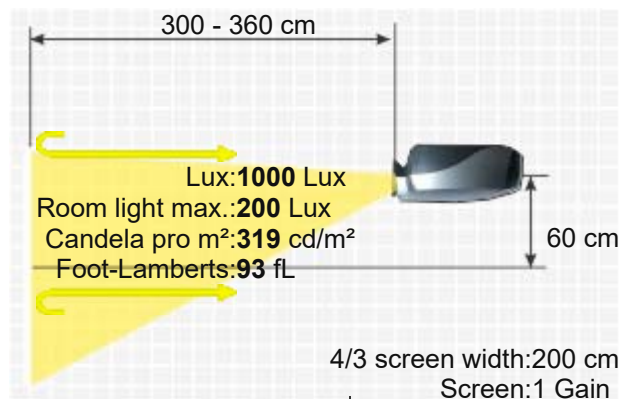

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level
Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
330W
317 x 98 x 288 mm (12,5"x3,9"x11,3") 8,95 L/dm³
35 / 29 dB in Eco Mode

Weight
Keystone
Illumination

3,60 kg / 7,94 lbs.
Vert.: +/-30° automatisch
-

Frequenz

H-sync: 15-106 kHz
V-sync: 50-120 Hz

Foot-Lamberts

93 fL / max. 477 cm screen width
319 cd/m²

- Full HD 1080P compatible
- Freeze
- Blank (Black screen button)
- Blackboard Modus
- User logo
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- Gamma correction
- Password protection
- Remote control with mouse control
- Overscan adjustable

Features

- | | |
|--------------------------------|--|
| Osram bulb only | NLMP18952 |
| Lamp ruby | Ruby-LMP18952 |
| Lamp incl. air filter original | DT01021 |
| Compatible lamp | LMP-K18938 |
| Remote control original | HL02881- R016F / HL03032 - R017H / HL02483 |
| Air filter original | MU06481 & MU06432 |
| Ceiling Mount 100-120 | Halterung100 |

Optional

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n18940>
2010 Discontinued (EOL) // Last update of the data: 2023-08-04

Status

Data



More Details



HCinema

<https://www.projector-database.com/pro/hitachicpx3010-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

