InFocus ScreenPlay 4805

Brief Introduction Beta 2.5	The InFocus ScreenPlay 4805 DLP projector has 750 Ansi lumens, a contrast of 2000:1 and a WVGA 854 x 480 resolution. The projector can illuminate a picture width of up to 278 cm thanks to the 750 Ansi lumens. In room light, however, the image width should ideally be less than 185 cm. The model was built by InFocus in 2004 and is no longer current.
Display Type	1 x 0,55" 12 Grad DDR DLP Chip WVGA 16/9 Ti Digital Light Processing Chip
Projector: Ansi-Lumen	750
Projector: Contrast	2000:1 full on/off
Projector: Black Level Offset	0,3750 min. Lumen
Screen	333 Lux (200 cm Screen width) 2000:1 full on/off 0,167 min. Lumen
Resolution	WVGA 854 x 480 409.920 Pixel XGA 1024 x 768 compressed
Video Modes	NTSC, PAL, SECAM EDTV 480p, 576p HDTV 1080i, 720p
Disc Recognition	DVD | HD Blu-ray (komprimiert) | ~~3D Blu-ray~~ | ~~4K UHD Blu-ray~~
Application	Homeciname | Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	200W SHP Lamp Article Nr.: SP-LAMP-021
Light Life	3000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,19
Objective	F=2,4 f=21-25 mm
Throw Ratio	1,77-2,13:1
Audio	1 x 2,5W Mono
Connections	M1-DA (DVI) YUV in S-Video in Cinch Video in Cinch Stereo in Mini Jack out

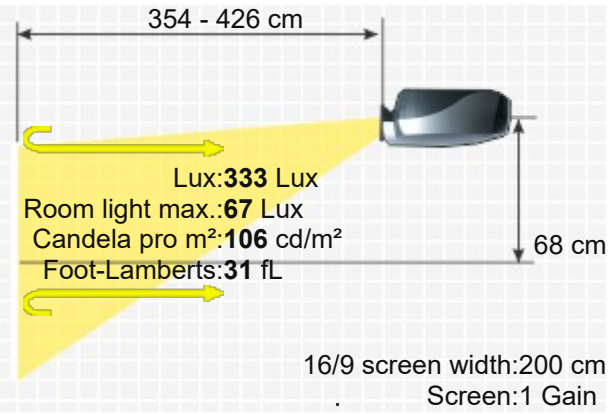

INFOCUS SCREENPLAY 4805

Ceiling Mounting	Yes, is possible.
Power	250W
Size WxHxD	249 x 106 x 318 mm (9,8"x4,2"x12,5") 8,39 L/dm³
Operating Noise	-

Key: 197 cm

Weight	3,50 kg / 7,72 lbs.
Keystone	Vert.: +/-20°
Illumination	-
Frequenz	-

Key: 61 cm

Foot-Lamberts	31 fL / max. 278 cm screen width 106 cd/m²
Features	■ Blank (Black screen button) ■ Remote control with mouse control ■ Remote control with backlight ■ Overscan adjustable ■ The model is also often referred to as LS4805, ■ this specification does not exist according to the manufacturer.
Screen Mirroring	-
In Test	-
Please note	The model is also often referred to as LS4805, this specification does not exist according to the manufacturer.

Optional accessories

	Nackte Lampe	NLMP1950	119,67 €
	Lampe Ruby	Ruby-LMP1950	76,53 €
	Lampe Original	SP-LAMP-021	EOL €
	Kompatible Lampe	LMP-K1950	68,41 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Deckenhalterung Länge 100-120 mm	Halterung120	47,86 €

Status 2004 Discontinued (EOL) // Last update of the data: 2026-06-09

Data

More Details

HCinema

https://www.projector-database.com/pro/infocusscreenplay4805-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.