

Nec M283X



Brief Introduction

Beta 2.5

The M283X 3D DLP projector from Nec has 2800 Ansi lumens, a contrast of 10000:1 and an XGA 1024 x 768 resolution. The built-in ambient light sensor detects the ambient light in the room and automatically optimizes the image. The projector is equipped with an integrated media player, so direct playback of files will not be a problem. Horizontal and vertical keystone correction makes image adjustment childs play. As the M283X is equipped with a microphone jack plug and 20W speaker, no additional audio system is required for presentations or training courses. An image width of up to 461 cm is possible as the projector has 2800 Ansi lumens. However, if room light is available, the picture should be max. 307 cm wide. It is also Full HD 1080P and 3D compatible. The model was built by Nec in 2015 and is no longer current.

Display Type

1 x 0,55" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2800 933 Lux (bei 200 cm Screen)

Contrast

10000:1 full on/off 10000:1 full on/off

Black Level

0,2800 min. Lumen 0,093 min. Lumen

Offset

Resolution

XGA 1024 x 768
786.432 Pixel
WUXGA 1920 x 1200 compressed
Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Video Modes

Media player formats: JPEG

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Medium screen width or rooms with little light, max. 100 lumens.

Light Life

200 / 120W im Eco Mode Lamp

Articel Nr.: NP27LP

Operating Costs

-

Focus

Manual

Zoom

Manual 1,67

Objective

F=2,4-3,1 f=17,09-29,05 mm

Throw Ratio


1,44-2,45:1

Audio

20W Mono

Connections

2 x HDMI in
D-sub 15pin in und out
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack Audio in und out
USB Typ A,B in
RS232C Din 9 pin in
RJ45 in
Mikrofon in

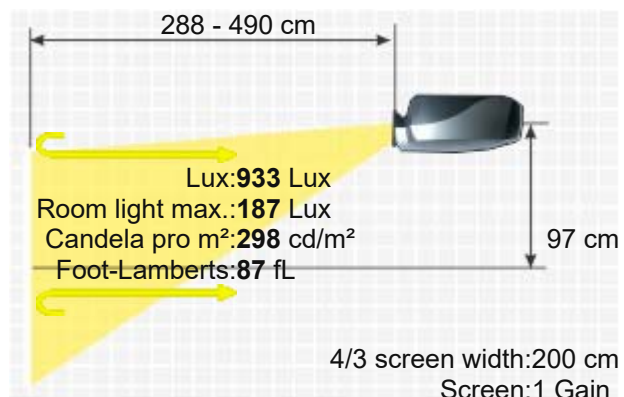



Ceiling Mounting	Yes
Power	242 / 162W in Eco Mode
Size WxHxD	368 x 108 x 291 mm (14,5"x4,3"x11,5") 11,57 L/dm³
Operating Noise	31 / 27 dB in Eco Mode

Weight	3,40 kg / 6,61 lbs.
Keystone	Vert.: +/-30° automatisch Hori.: +/-25°

Illumination


Frequenz

Foot-Lamberts

Features

OptionalStatus

Data

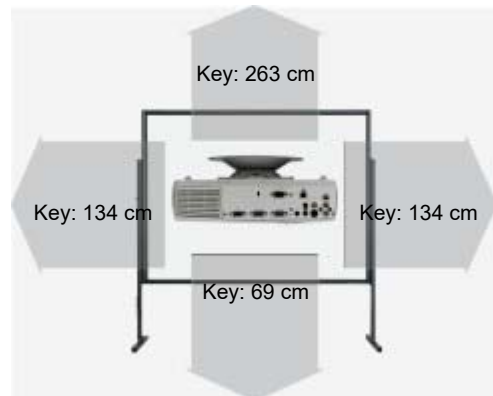

More Details



HCinema

<https://www.projector-database.com/pro/necm283x-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCCinema is not responsible for any errors or omissions contained in product descriptions.