

Nec NP310/ EDU

NEC NP310/ EDU



With the NP310/ EDU, manufacturer Nec offers a standard portable LCD projector with XGA 1024 x 768 resolution and a contrast of 2000:1. The manufacturer Nec specifies a lamp life of 4000 hours, which converts to over 5.5 years at 2 hours per day. An image width of up to 408 cm is possible as the projector has 2200 Ansi lumens. However, if room light is available, the picture should be max. 272 cm wide. The model was built by Nec in 2009 and is no longer current.

Brief Introduction

Beta 2.5

Display Type

3 x 0,63" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

2200

733 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

1,1000 min. Lumen

0,367 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

180 / 168W im Eco Mode Lamp

Articel Nr.: NP14LP / 60002852

Light Life

4000 h. 5000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,7-2,0 f=19,8-23,7 mm

Throw Ratio

1,5-1,8:1

Audio

1 x 7W

Connections

DVI in

D-sub 15 pin in und out

S-Video in


Cinch Video in

Cinch Stereo in

Mini Jack Audio in und out

RJ45 in

RS232C

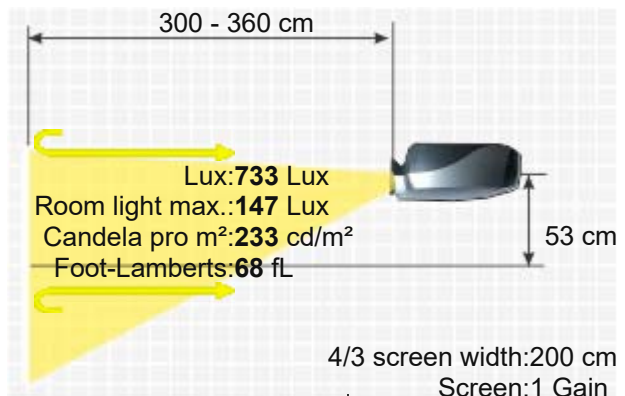



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
239 / 195W in Eco Mode
308 x 93,5 x 262 mm (12,1"x3,7"x10,3") 7,5 L/dm³
35 / 29 dB in Eco Mode

Weight
Keystone
Illumination

2,99 kg / 6,59 lbs.
Vert.: +/-30° automatisch
-

Frequenz

H-sync: 15-100 kHz
V-sync: 50-120 Hz

Foot-Lamberts

68 fL / max. 408 cm screen width
233 cd/m²

Features

- Direkt Power Off
- Freeze
- Blackboard Modus
- User logo
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- sRGB
- Gamma correction
- Password protection
- Remote control with mouse control
- Control via web browser
- Lan network compatible.
- Overscan adjustable
- 3D Reform
- Digital Zoom

Optional

Bulb only	NLMP19198
Lamp ruby	Ruby-LMP19198
Lamp incl. air filter original	NP14LP / 60002852
Compatible lamp	LMP-K19194
Remote compatible	Alternative zu: 7N900901 / RD-445E / RMT-PJ29
Remote control original	7N900901 / RD-445E / RMT-PJ29
Air filter original	NECFilter
Ceiling Mount 100-120	Halterung100

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n19197>
2009 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/necnp310-en.html>