

ASK Proxima S2280



ASK PROXIMA S2280



Brief Introduction

Beta 2.5

The ASK Proxima S2280 LCD projector has 2800 Ansi lumens, a contrast of 3500:1 and an XGA 1024 x 768 resolution. Thanks to the short-throw projection ratio of just 0.64:1, the projector is not distracting in the room. For a 2m wide image, the projector only needs to be 128 cm away from the screen. It is also Full HD 1080P compatible. This model is no longer offered by ASK Proxima.

Display Type



3 x 0,59" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

2800

933 Lux (bei 200 cm Screen)

Contrast

3500:1 full on/off

3500:1 full on/off

Black Level

0,8000 min. Lumen

0,267 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D Blu-ray | 4K UHD Blu-ray

Application

Short Distance | Medium screen width or rooms with little light, max. 100 lumens.

Light Source

230W USHIO Lamp

Light Life

3000 h. 5000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

F=1,8 f=8,08mm

Throw Ratio

0,64:1

Audio

-

Connections

HDMI in
2 x D-sub 15pin in 1 x out
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack Audio in und out
RS232C Din 9 pin in
RJ45 in

Ceiling Mounting

Yes

Power

280W

Size WxHxD

361,5 x 92 x 314,20 mm (14,2"x3,6"x12,4") 10,43 L/dm³

Operating Noise

34 / 29 dB in Eco Mode



Weight

3,70 kg / 8,16 lbs.

Keystone

Vert.: +/-30°


Illumination

85%

Frequenz

H-sync: 15-100 kHz

V-sync: 50-100 Hz

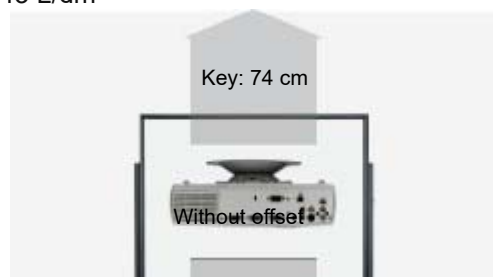

Foot-Lamberts

87 fL / max. 461 cm screen width

298 cd/m²

Features

■ Full HD 1080P compatible

■ Eco Mode


■ Lan network compatible.

■ Short-throw projector

Status

2012 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/askproximas2280-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.