

Nec P502H

NEC P502H



The Nec P502H standard portable 3D DLP projector has 5000 Ansi lumens, a contrast of 6000:1 and an HDTV 1920 x 1080 resolution. The manufacturer Nec specifies a lamp life of 5000 hours, which is over 6.8 years with a daily viewing time of 2 hours. With the lens shift function, the projector can be positioned very freely. The projector can illuminate images up to 718 cm wide thanks to its 5000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 479 cm is recommended. The HDMI MHL (Mobile High-Definition Link) port allows 1080p / 60 Hz image mirroring (screen mirroring) to be transmitted from a smartphone while it is being charged at the same time via the connection. Playing 1080P and 3D is also no problem for the projector. The model was built by Nec in 2015 and is no longer current.

Brief Introduction

Beta 2.5

Display Type

1 x 0,65" DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

5000 2222 Lux (bei 200 cm Screen)

Contrast

6000:1 full on/off 6000:1 full on/off

Black Level

0,8333 min. Lumen 0,37 min. Lumen

Lens shift

Vert.: +62% -0% Hori.: +/-25%

Resolution

HDTV 1920 x 1080
2.073.600 Pixel
UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

375W Lamp
Articel Nr.: NP39LP

Light Life

5000 h.

Operating Costs

14,29% / 0,06 €

Focus

Manual

Zoom

Manual 1,69

Objective


F=2,0 f=18,2-31,1 mm

Throw Ratio

1,24-2,1:1

Audio

20W

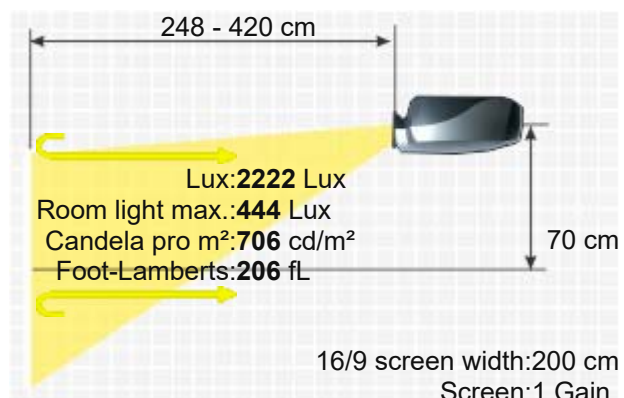

Connections

HDMI mit MHL in
D-sub 15pin in und out
Cinch Video in
Cinch Stereo in
Mini Jack Audio in und out
USB in
RS232C Din 9 pin in
RJ45 mit HDBaseT in



Ceiling Mounting

Yes

Power

-

Size WxHxD

362 x 139 x 306 mm (14,3"x5,5"x12") 15,4 L/dm³

Operating Noise

39 / 31 dB in Eco Mode

Weight

5,20 kg / 11,46 lbs.

Keystone

Vert.: +/-30°

Hori.: +/-25°

Illumination

-

Frequenz

H-sync: 15-100 kHz

V-sync: 50-120 Hz

Foot-Lamberts

206 fL / max. 718 cm screen width

706 cd/m²

■ Real Full HD 3D

■ Full HD 1080P compatible

■ Lens shift Funktion

■ Blackboard Modus

■ User logo

■ Eco Mode

■ Dynamic iris

■ Password protection

■ PJLink™

■ Control via web browser

■ Optional Wi-Fi network compatible.

■ Optional LAN network compatible.

■ Crestron®-Software compatible.

■ Dicom simulation

Features

Optional

Lamp original

NP39LP / 100014157

Remote control original

7N901122 RD-472E

Cable cover original

100014158 / NP09CV


Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=23582>

2015 Discontinued (EOL) // Last update of the data: 2023-09-20

Created: 2015-11-10 15:46:02

Data

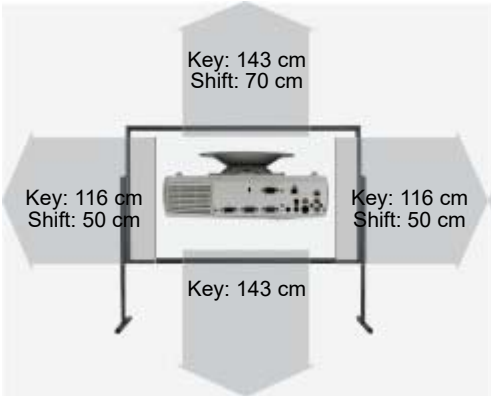

More Details



HCinema

<https://www.projector-database.com/pro/necp502h-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.