
Optoma EH334



OPTOMA EH334

Brief Introduction Beta 2.5	The Optoma model EH334 is a DLP projector with HDTV 1920 x 1080 resolution and a contrast of 20000:1. The lamp life is up to 15000 hours, which converts to over 20.5 years at 2 hours per day. A picture width of up to 610 cm is possible, if the picture width is smaller (we recommend max. 407 cm), rooms with residual light are also no problem. The HDMI MHL (Mobile High-Definition Link) port allows 1080p / 60 Hz image mirroring (screen mirroring) to be transmitted from the smartphone while it is being charged at the same time via the connection. The projector can also play 1080P and 3D without any problems. The projector is very quiet compared to other projectors with an operating noise of 27 decibels. The model was built by Optoma in 2017 and is no longer current.
Display Type	1 x DLP Chip HDTV 16/9 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 3600 / Screen: 1600 Lux (bei 200 cm Screen)
Contrast	20000:1 / 20000:1
Black Level Offset	0,1800 min. Lumen / 0,08 min. Lumen
Resolution	HDTV 1920 x 1080 2.073.600 Pixel
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
3D Compatibility	Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom Frame Sequential (3D Ready)
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	240W Lamp Articel Nr.: BL-FP240G / SP.7AZ01GC01
Light Life	3500 h. / 15000 in Eco+ Mode
Operating Costs	9,52% / 0,04 €
Focus	Manual
Zoom	Manual 1,1
Objective	f=15,59-17,14 mm
Throw Ratio	1,47-1,62:1
Audio	10W
Connections	1 x HDMI in(1.4a 3D support ;MHL) D-sub 15pin in Cinch Video in Mini Jack Audio in und out

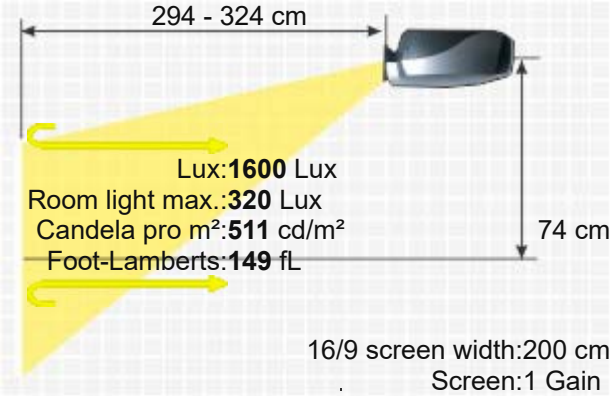

USB in
RS232C Din 9 pin in



Ceiling Mounting	Yes
Power	295W
Size WxHxD	316 x 108 x 244 mm (12,4"x4,3"x9,6") 8,33 L/dm³
Operating Noise	27dB



Weight	2,93 kg / 6,46 lbs.
Keystone	Vert.: +/-40°
Illumination	-
Frequenz	H-sync: 15,4-91,2 kHz V-sync: 50-120 Hz
Foot-Lamberts	149 fL / max. 610 cm screen width 511 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- Lan network compatible.
- Crestron®-Software compatible.
- AMX

Optional

Remote control original	BR-3079N, 45.71P01G002
Lamp original	BL-FP240G / SP.7AZ01GC01

Order here: https://www.hcinema.de/lampen/shop-en.php?id=fro24652

Status

2017 Discontinued (EOL) // Last update of the data: 2023-09-20
Created: 2018-02-14 19:34:51

Data



More Details

https://www.projector-database.com/pro/optomaeh334-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.