

Optoma EP7161



OPTOMA EP7161



Brief Introduction

Beta 2.5

The Optoma model EP7161 is a DLP projector with SVGA 800 x 600 resolution and a contrast of 2000:1. Due to the brightness of 2000 Ansi lumens, a picture width of 389 cm is possible. In room light, the picture should be max. 259 cm wide. The model was built by Optoma in 2006 and is no longer current.



1 x 0,55" DDR DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

2000

667 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

1,0000 min. Lumen

0,334 min. Lumen

Offset

-

Resolution

SVGA 800 x 600

480.000 Pixel

SXGA+ 1400 x 1050 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200W UHP Lamp

Articel Nr.: LMPf12611

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

28,57% / 0,12 €

Focus

Manual

Zoom

Manual 1,2

Objective

F=2,7-3,0 f=21,83-23,81 mm

Throw Ratio

1,93-2,13:1

Audio

1 x 2W Mono

Connections

2 x D-sub 15pin in 1 x out

Cinch Video in

S-Video in

Mini Jack in

RS232C

Ceiling Mounting

Yes

Power

265W / 5W standby

Size WxHxD

230 x 95 x 230 mm (9,1"x3,7"x9,1") 5,03 L/dm³

Operating Noise

32 / 28 dB in Eco Mode

Weight

2,00 kg / 4,41 lbs.

Keystone

Vert.: +/-15°

Illumination

85%

Frequenz



H-sync: 31,5-100 kHz

V-sync: 50-85 Hz

Foot-Lamberts

62 fL / max. 389 cm screen width

212 cd/m²

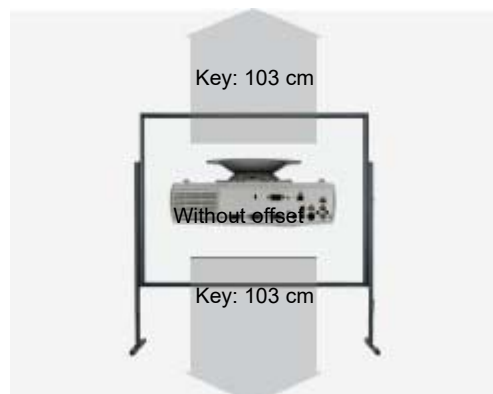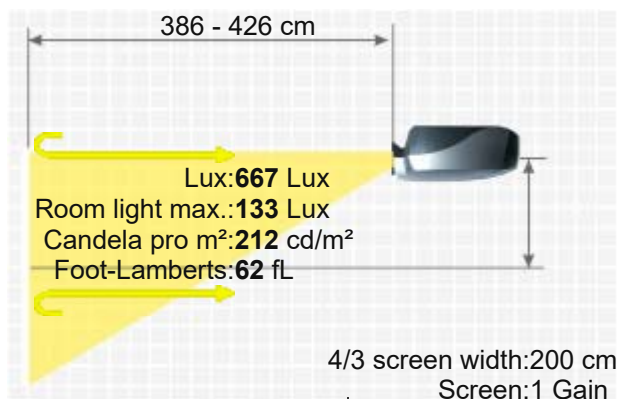

- Freeze
- Eco Mode
- Kensington Slot
- sRGB
- Remote control with laser pointer
- deinterlacer with 3:2 2:2 pull down
- digital zoom

Bulb only	NLMP4402
Lamp ruby	Ruby-LMP4402
Lamp original	BL-FU180A / SP.82G01.001 / SP.82G01GC01
Compatible lamp	LMP-K15433
Universal Remote original	Fernb-uni-V3
Remote control original	45.82G01G104
Ceiling Mount 100-120	Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n4404>

2006 Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/optomaep7161-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.