

Optoma PRO800P

OPTOMA PRO800P



Brief Introduction

Beta 2.5

A brief introduction to the Optoma PRO800P. The DLP projector has an HDTV 1920 x 1080 resolution and a contrast of 2200:1. An image width of up to 538 cm is possible. However, the picture should be smaller in room light. We recommend max. 359 cm. The model is also Full HD 1080P compatible. At just 30 decibels, the device is one of the quieter projectors. The model was built by Optoma in 2011 and is no longer current.

Display Type



1 x 0,65" DC2 DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

2800

1244 Lux (bei 200 cm Screen)

Contrast

2200:1 full on/off

2200:1 full on/off

Black Level

1,2727 min. Lumen

0,566 min. Lumen

Offset

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

230W P-VIP Lamp

Articel Nr.: BL-FP230D /

SP.8EG01GC01

Light Life

3000 h. 4000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=2,55-2,87 f=22,41-26,82 mm

Throw Ratio

1,5-1,8:1

Audio

8W

Connections

HDMI in

D-sub 15 pin in und out

S-Video in

Cinch Video in

Cinch Stereo in und out

12V Trigger out

Ceiling Mounting


Yes

Power

339 / 281W in Eco Mode

Size WxHxD

324 x 97 x 234 mm (12,8"x3,8"x9,2") 7,35 L/dm³

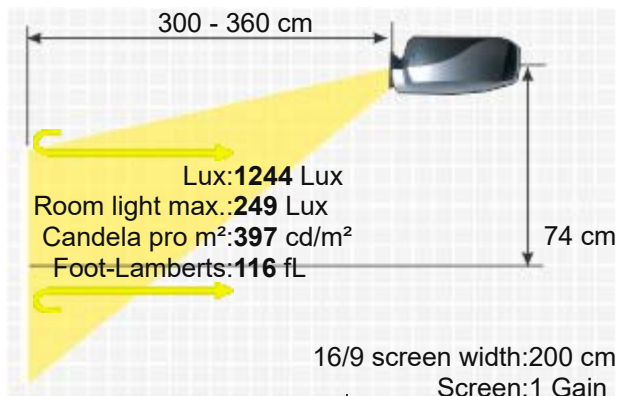

Operating Noise 30 / 29 dB in Eco Mode

Weight 2,90 kg / 6,39 lbs.
Keystone Vert.: +/-20°
Illumination 85%

Frequenz H-sync: 15,3-91,4 kHz
V-sync: 24-85 Hz

Foot-Lamberts 116 fL / max. 538 cm screen width
397 cd/m²

- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- Password protection
- BrilliantColor™
- Remote control with laser pointer

Optional Remote control original BR-5023L / BR-3057L / BR-5029L / BR-5030L / BR-5033L

Optional Lamp original BL-FP230D / SP.8EG01GC01

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro20560>

2011 Discontinued (EOL) // Last update of the data: 2023-08-04



Data



More Details



HCinema

<https://www.projector-database.com/pro/optomapro800p-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.