

Optoma ZU406

EAN/UPC:796435 44 437 2

OPTOMA ZU406



With the ZU406, manufacturer Optoma offers a DLP laser projector with WUXGA 1920 x 1200 resolution and a contrast of 300000:1. The manufacturer claims a laser service life of 30,000 hours, which is over 20.5 years if enjoyed for four hours a day. The integrated lens shift gives freedom when positioning the projector. The model offers a microphone jack plug and 15W speakers, so no additional audio equipment is required for presentations or training courses. 4500 Ansi lumens ensure that a picture width of 682 cm is also possible. The projector manages rooms with residual light with a smaller image width, we recommend a maximum of 455 cm. Video signals 1080P and 3D are also no problem for the projector, and it even has the option of projecting HD 1080P Blu-rays onto the ceiling thanks to 360° projection. The model was built by Optoma in 2020 and is no longer current.



1 x 0,67" DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Brief Introduction

Display Type

Ansi-Lumen 4500
Contrast 300000:1
Black Level 0,0150 min. Lumen
Lens shift Vert.: +60% --50%

Resolution WUXGA 1920 x 1200
2.304.000 Pixel

Video Modes Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
3D Compatibility Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application Standard-Portabel | External training and company presentations, as well as product presentations.
Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source Laser
Articel Nr.: BR-3075W /

Light Life 45.79P01G001A
30000 h.

Operating Costs 0,00 € Laser


Focus Manual

Zoom Manual 1,3

Objective F=1,94-2,23 f=12,81-16,74 mm

Throw Ratio 1,21-1,59:1

Audio 2 x 15W

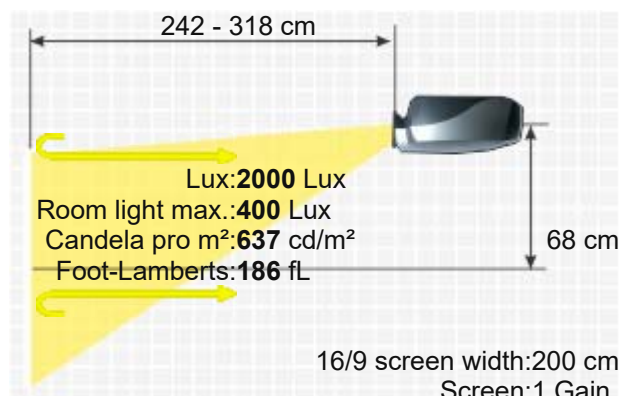

2 x HDMI in
D-sub 15pin in und out
Cinch Video in
Mini Jack Audio in und out
USB in
RS232C Din 9 pin in
RJ45 in
3D Sync
12V Trigger out
Microphone

Connections



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
272W / 218W in Eco Mode
336,8 x 121,9 x 266,7 mm (13,2"x4,8"x10,5") 10,81 L/dm³
32dB

Weight
Keystone
Illumination

4,54 kg / 8,82 lbs.
Vert.: +/-30° automatisch
Hori.: +/-30°
-

Frequenz

H-sync: 24-120 kHz
V-sync: 15-91 Hz

Foot-Lamberts

186 fL / max. 682 cm screen width
637 cd/m²

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- High Dynamic Range (HDR)
- 360° installable
- 24/7 continuous operation capable
- Lan network compatible.
- Crestron®-Software compatible.

Features

Optional

Remote control original BR-3075W / 45.79P01G001A
Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro9002172>
2020 Discontinued (EOL) // Last update of the data: 2023-09-20
Created: 2020-03-09 15:38:17

Status

Data



More Details



HCinema

<https://www.projector-database.com/pro/optomazu406-en.html>