

Panasonic PT TW240

PANASONIC PT TW240



A brief introduction to the Panasonic PT TW240. The DLP projector has a WXGA 1280 x 800 resolution and a contrast of 4000:1. The lamp life is specified by the manufacturer as 4000 hours, which is over 5.5 years if enjoyed for two hours a day. Thanks to the short-throw projection ratio of just 0.521:1, the projector does not stand still in the room. For a 2m wide image, the projector only needs to be 104 cm away from the screen. Playing 1080P is also no problem for the projector. The model was built by Panasonic in 2013 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



1 x 0,65" DLP Chip

WXGA 16/10 Ti Digital Light Processing Chip

Ansi-Lumen

2700

1080 Lux (bei 200 cm Screen)

Contrast

4000:1 full on/off

4000:1 full on/off

Black Level

0,6750 min. Lumen

0,27 min. Lumen

Offset

Resolution

WXGA 1280 x 800

1.024.000 Pixel

UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D Blu-ray | 4K UHD Blu-ray

Application

Short Distance | Medium screen width or rooms with little light, max. 100 lumens.

Light Source

190W UHM Lamp

Articel Nr.: ET-LAL331

Light Life

4000 h. 8500 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

F=2,8 f=7,51mm

Throw Ratio

0,521:1

Audio

8W Mono

Connections

HDMI in

2 x D-sub 15pin in 1 x out

Cinch Video in

S-Video in

Mini Jack Audio in und out

RJ45 in

Ceiling Mounting

Yes

Power


320W

Size WxHxD

288 x 99,8 x 220 mm (11,3"x3,9"x8,7") 6,27 L/dm³

Operating Noise

35 / 29 dB in Eco Mode

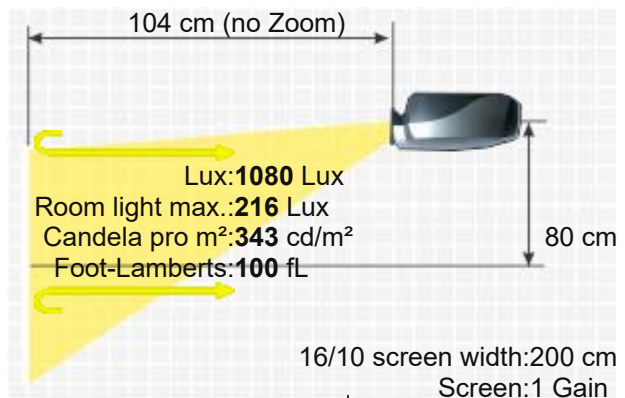

Key: 167 cm

Weight 2,50 kg / 5,51 lbs.
Keystone Vert.: +/-40°
Illumination -
Frequenz H-sync: 15-100 kHz
V-sync: 24-120 Hz
Range max.: 165 MHz
Foot-Lamberts 100 fL / max. 528 cm screen width
343 cd/m²
Features

- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- PJLink™
- Lan network compatible.
- Short-throw projector
- Crestron®-Software compatible.

Optional Remote control original H458UB01G001
Lamp original ET-LAL331
Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fi22651>
2013 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2013-07-26 14:06:56



More Details



HCinema

<https://www.projector-database.com/pro/panasonicptw240-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.