Planar PR3020



Brief Introduction Beta 2.5	The Planar PR3020 DLP projector has 2500 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. The projector can illuminate a picture width of up to 435 cm thanks to its 2500 Ansi lumens. In room light, however, the image width should ideally be less than 290 cm. The model was built by Planar in 2006 and is no longer current.
Display Type	1 x DLP Chip XGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 2500 / Screen: 809 Lux (bei 203 cm Screen)
Contrast	Projector: 2000:1 full on/off / Screen: 2000:1 full on/off
Black Level	Projector: 1,2500 min. Lumen / Screen: 0.405 min. Lumen
Offset	
Resolution	XGA 1024 x 768 786.432 Pixel SXGA+ 1400 x 1050 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	200W Lamp Articel Nr.: 997-3346-00
Light Life	2000 h. 4000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,15
Objective	-
Throw Ratio	1,8-2,1:1
Audio	5W Mono
Connections	D-sub 15 pin in S-Video in Cinch Video in Mini Jack in USB Typ A und B
Ceiling Mounting	Yes
Power	290W / 5W standby
Size WxHxD	300 x 88 x 244 mm (11,8"x3,5"x9,6") 6,44 L/dm³

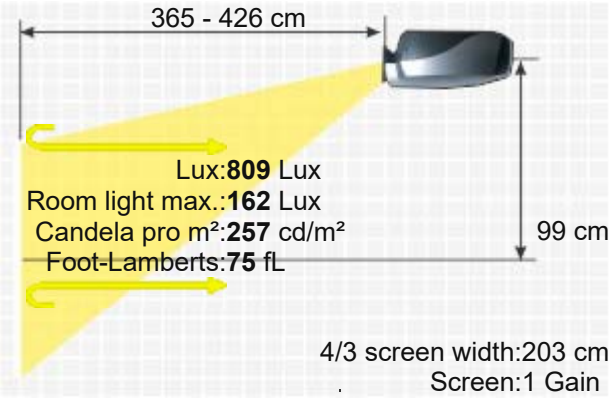



PLANAR PR3020

Operating Noise	31 dB in Eco Mode
Weight	3,30 kg / 7,28 lbs.
Keystone	Vert.: +/-15°
Illumination	-
Frequenz	H-sync: 15,31-70 kHz V-sync: 50-85 Hz
Foot-Lamberts	75 fL / max. 435 cm screen width 257 cd/m²

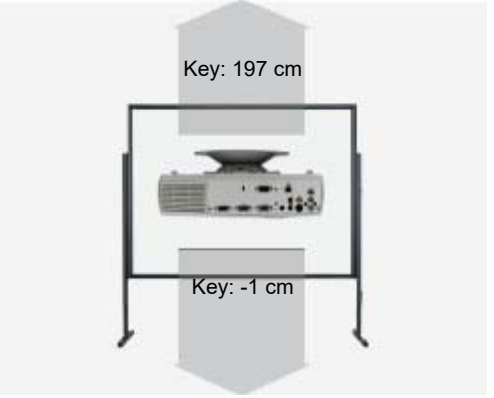

Features

- Freeze
- Eco Mode
- Kensington Slot
- Gamma correction
- Password protection
- Remote control with laser pointer
- Digital Zoom
- 5-segment colour wheel

Optional

Osram bulb only	NLMP15705
Lamp ruby	Ruby-LMP15705
Lamp original	997-3346-00
Compatible lamp	LMP-K15705
Ceiling Mount 100-120	Halterung100

Status

Order here: https://www.hcinema.de/lampen/shop-en.php?id=n15706
2006 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details

HCinema
https://www.projector-database.com/pro/planarpr3020-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.