

projectiondesign Action! M20



Manufacturer projectiondesign offers the Action! M20, a DLP projector with HDTV 1280 x 720 resolution and a contrast of 4000:1. The integrated lens shift gives freedom when positioning the projector. Thanks to the brightness of 1000 Ansi lumens, a picture width of 321 cm is possible. In room light, the image should be max. 214 cm wide. Playing 1080P is also no problem for the projector. The projector is very quiet compared to other projectors with an operating noise of 24 decibels. The model was built by projectiondesign in 2007 and is no longer current.

Brief Introduction Beta 2.5

Display Type

 1 x HD2+ DC3 DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 1000 - 500 Screen 444 Lux (bei 200 cm Screen)

Contrast

4000:1 full on/off 4000:1 full on/off

Black Level

0,2500 min. Lumen 0,111 min. Lumen

Lens shift

Vert.: +67,5% -10%

Resolution

HDTV 1280 x 720

921.600 Pixel

HDTV 1920 x 1080 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D-Blu-ray | 4K-UHD-Blu-ray

Application

Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

170 - 220W UHP Lamp

Article Nr.: 400-0402-00

Light Life

3000 h. 2250 h. in high power mode

Operating Costs

27,78% / 0,2 €

Focus

Manual

Zoom

Manual 1,25

Objective

-

Throw Ratio


1,95-2,43:1

Audio

Nein

Connections

1x DVI-D
1x VGA
1x DVI (HDCP)
1x YPbPr / RGBS
1x S-video
1x composite video

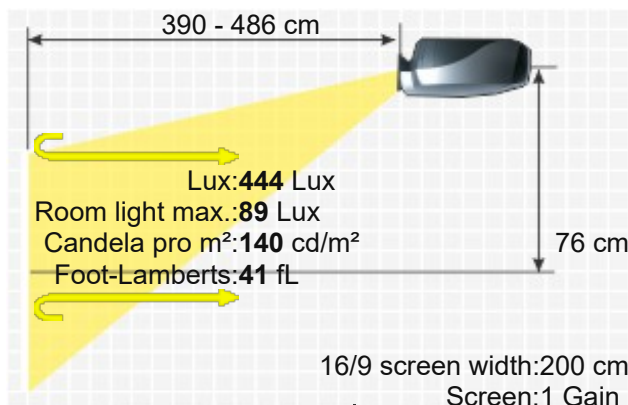

9-pin DSUB RS232
 USB
 RJ-45 TCP/IP
 Yes, is possible.
 -
 278 x 94 x 234 mm (10,9"x3,7"x9,2") 6,11 L/dm³
 24dB

Ceiling Mounting
 Power
 Size WxHxD
 Operating Noise

Weight 2,98 kg / 6,57 lbs.
 Keystone -
 Illumination -

Frequenz -


Foot-Lamberts 41 fL / max. 321 cm screen width
 140 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- Gamma correction
- BrilliantColor™
- Remote control with laser pointer und mouse control
- Lan network compatible.
- Faroudja DCDi

Features

Screen Mirroring
 In Test

-
 -

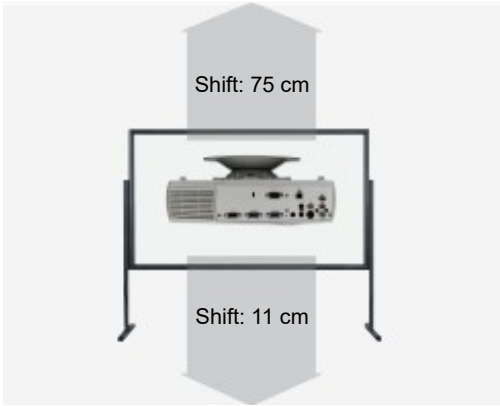

Optional accessories

	Nackte Lampe	NLMP15413	87,17 €
	Lampe Ruby	Ruby-LMP15413	116,29 €
	Lampe Original	R9801265 / 400-0402-00	602,09 €
	Kompatible Lampe	LMP-K15413	57,86 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Fix Optional Lenses					
Wide angle 1:1	1.1:1	2.2 m	40%		No Zoom
Wide Angle 0.90:1	0.9:1	1.8 m	0.0% Fix		No Zoom

Status 2007 Discontinued (EOL) // Last update of the data: 2025-03-03

Data



More Details



HCinema

<https://www.projector-database.com/pro/projectiondesignactionM20-en.html>