CTX PS 6140





3LCD Bild im Bild

Brief Introduction Beta 2.5	A brief introduction to the CTX PS 6140. The standard portable LCD projector has an XGA 1024 x 768 resolution and a contrast of 400:1. The brightness of 1400 Ansi lumens enables a picture width of 326 cm. In room light, the picture should be max. 217 cm wide. This model is no longer offered by CTX.
Display Type	3 x 0,7 TFT Panel XGA 4/3 Liquid Crystal Display

	Projector	Screen
Ansi-Lumen	1400	453 Lux (bei 203 cm Screen)
Contrast	400:1 full on/off	400:1 full on/off
Black Level	3,5000 min. Lumen	1.141 min. Lumen
Offset	-	

Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	NTSC / NTSC4.43 / PAL / PAL-M / PAL-N / SECAM
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	150W EHPL Lamp
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,3
Objective	F=1,7-1,9 f=21,5-28 mm
Throw Ratio	1,51-1,97:1
Audio	1 x 1W
Connections	DVI in D-sub 15pin in Cinch Video in S-Video in Mini Jack in Maus in
Ceiling Mounting	Yes
Power	220W / 12W standby
Size WxHxD	243 x 91 x 283 mm (9,6"x3,6"x11,1") 6,26 L/dm³
Operating Noise	38dB
Weight	2,70 kg / 5,95 lbs.
Keystone	Vert.: +/-15°
Illumination	85%
Frequenz	H-sync: 15-91 kHz V-sync: 43-85 Hz
Foot-Lamberts	42 fL / max. 326 cm screen width 144 cd/m²

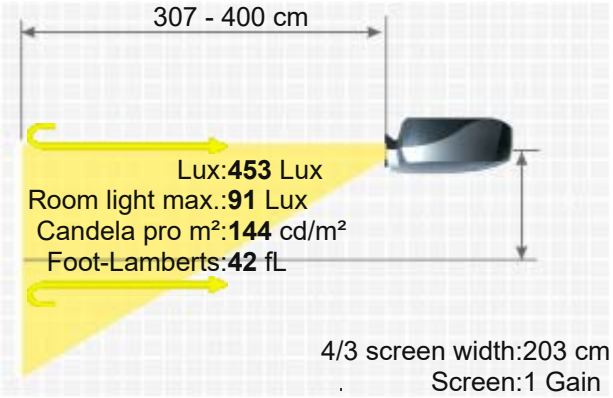

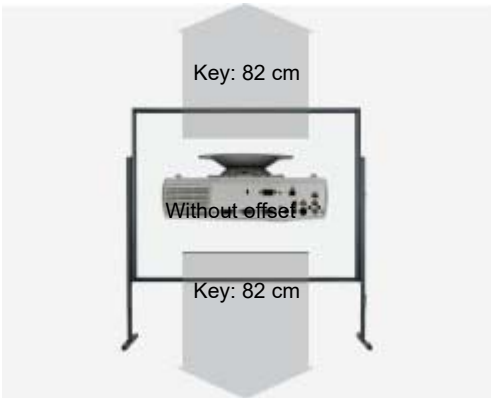

Features	■ Picture-in-Picture
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

HCinema

https://www.projector-database.com/pro/ctxps6140-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.