

Sanyo PLV Z700

SANYO PLV Z700



Brief Introduction

Beta 2.5

The Sanyo PLV Z700 LCD projector has 1200 Ansi-Lumen, a contrast of 10000:1 and a HDTV 1920 x 1080 resolution. Includes a lens shift function, which provides freedom during installation. An image width of up to 352 cm is possible as the projector has 1200 Ansi lumens. However, if room light is available, the image should be max. 235 cm wide. Even 1080P video signals are no problem for the projector. The model was built by Sanyo in 2008 and is no longer current, but is still very popular in our projector database.

Display Type

3 x 0,74" LCD TFT Panel
HDTV 16/9 Liquid Crystal Display

Ansi-Lumen

1200

533 Lux (200 cm Screen width)

Contrast

10000:1 full on/off

10000:1 full on/off

Black Level

0,1200 min. Lumen

0,053 min. Lumen

Lens shift

Vert.: +/-100% Hori.: +/-50%

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

Application

Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

165W UHP Lamp

Article Nr.: LMP-114

Light Life

2000 h. 3000 in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 2

Objective

F=2,0-3,0 f=22,3-45,3 mm

Throw Ratio

1,36-2,76:1

Audio

Nein


Connections

2 x HDMI in
D-sub 15pin in
2 x YUV in
Cinch Video in
S-Video in




Ceiling Mounting Power

Yes, is possible.
246 / 187W in Eco Mode

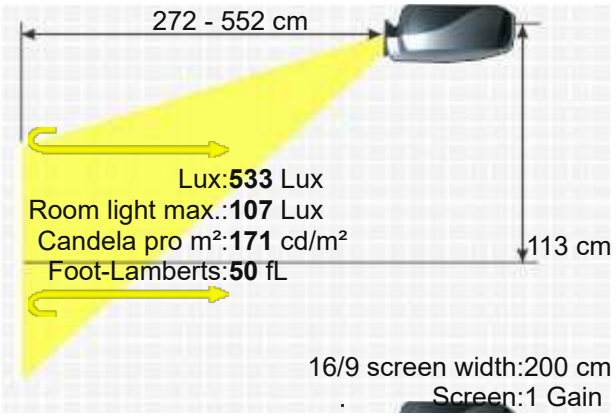

Size WxHxD	400 x 154 x 346 mm (15,7"x6,1"x13,6") 21,31 L/dm³
Operating Noise	21 dB in Eco Mode
Weight	7,50 kg / 16,53 lbs.
Keystone	-
Illumination	85%
Frequenz	H-sync: 15-80 kHz V-sync: 50-100 Hz Range max.: 100 MHz
Foot-Lamberts	50 fL / max. 352 cm screen width 171 cd/m²
Features	■ Full HD 1080P compatible ■ Lens shift Funktion ■ Freeze ■ User logo ■ Eco Mode ■ Kensington Slot ■ Gamma correction ■ Dynamic iris ■ Remote control with backlight ■ Overscan adjustable
Screen Mirroring	Optional only Chromecast / Fire TV / Apple TV / Mi Box Ads
In Test	-

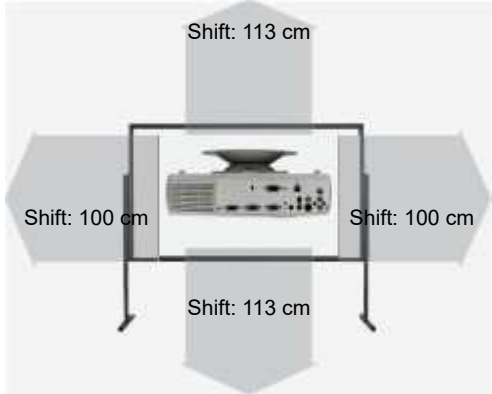

Optional accessories			
	Nackte Philips Lampe	NLMP18101	95,50 €
	Lampe Ruby	Ruby-LMP18101	96,62 €
	Lampe Original	610-336-5404 / LMP114 / 610-344-5120 / LMP135 / ET-SLMP135	EOL €
	Kompatible Lampe	LMP-K18101	69,20 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Fernbedienung Original	645 092 8710 / CXWY	EOL €
	Luftfilter Original	MD4A / 610-336-3189	EOL €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status

2008 Discontinued (EOL) // Last update of the data: 2026-06-09



More Details

HCinema

<https://www.projector-database.com/pro/sanyoplzv700-en.html>