

Sony VPL DX15



SONY VPL DX15



With the VPL DX15, manufacturer Sony offers a standard portable LCD projector with XGA 1024 x 768 resolution and a contrast of 700:1. The projector is equipped with an integrated media player, so direct playback of files will not be a problem. An image width of up to 477 cm is possible. However, the picture should be smaller in room lighting. We recommend max. 318 cm. The model was built by Sony in 2009 and is no longer current.

 3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector	3000 / 2400 lm Eco Mode	Screen	1000 Lux (bei 200 cm Screen)
Contrast	700:1 full on/off		700:1 full on/off
Black Level Offset	4,2857 min. Lumen		1,435 min. Lumen

Resolution
XGA 1024 x 768
786.432 Pixel

SXGA+ 1400 x 1050 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Media player formats: Microsoft PowerPoint®, Excel®, Windows Media® Video (WMV) und JPEG-Dateien

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source
200W Lamp
Articel Nr.: LMP-D200

Light Life
2000 h.

Operating Costs
16,67% / 0,07 €

Focus
Manual

Zoom
Manual 1,2

Objective
F=1,65-1,8 f=18,63-22,36 mm


Throw Ratio
1,46-1,75:1

Audio
1W Mono

D-sub 15 pin in
S-Video in
Cinch Video in
RJ45 in
USB Typ A



Ceiling Mounting
Yes
Power
320W / 10,5W standby
Size WxHxD
295 x 74 x 204 mm (11,6"x2,9"x8") 4,45 L/dm³
Operating Noise
-

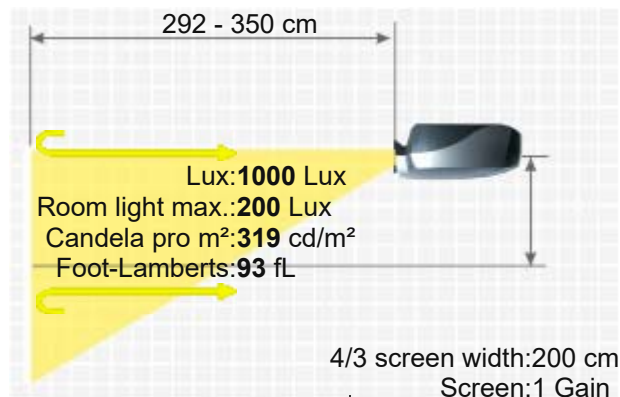

Weight	2,20 kg / 4,85 lbs.	
Keystone	-	
Illumination	-	
Frequenz	H-sync: 19-80 kHz V-sync: 48-92 Hz	
Foot-Lamberts	93 fL / max. 477 cm screen width 319 cd/m²	
Features	■ Integrated Mediaplayer	
	■ Freeze	
	■ Eco Mode	
	■ Kensington Slot	
	■ Gamma correction	
Optional	■ Password protection	
	■ Wi-Fi network compatible.	
	■ Lan network compatible.	
	■	
	Philips bulb only	NLMP18937
Status	Lamp ruby	Ruby-LMP18937
	Lamp original	LMP-D200
	Compatible lamp	LMP-K18935
	Remote control original	148717712 / RM-PJ6
	Ceiling Mount 100-120	Halterung100
Order here: https://www.hcinema.de/lampen/shop-en.php?id=n18937		
2009 Discontinued (EOL) // Last update of the data: 2023-08-04		



More Details

HCinema

<https://www.projector-database.com/pro/sonyvpldx15-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.