

Digital Projection iVision 50 WUXGA XB (Preliminary)



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution
Video Modes

3D Compatibility

Application

Light Source
Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Weight
Keystone
Illumination

The Digital Projection iVision 50 WUXGA XB (Preliminary) stationary 3D DLP projector has 2700 Ansi lumens, a contrast of 5300:1 and a WUXGA 1920 x 1200 resolution. Due to the brightness of 2700 Ansi lumens, a picture width of 528 cm is possible. In room light, the picture should be max. 352 cm wide. Video signals 1080P and 3D are also no problem for the projector. This model is no longer offered by Digital Projection.



1 x 0,95" DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Projector

2700
5300:1 full on/off
0,5094 min. Lumen

Screen

1200 Lux (bei 200 cm Screen)
5300:1 full on/off
0,227 min. Lumen

WUXGA 1920 x 1200
2.304.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with little light, max. 100 lumens.

350W Lamp
2000 h. 2500 h. in Eco Mode

-

Powered

Powered

optional

optional

Nein


HDMI 1.4 in
DVI-I in
D-sub 15pin in
USB Typ A in
RS232C Din 9 pin in
RJ45 mit HDBaseT in
3GSDI

Yes, is possible.

530W
342 x 143 x 306 mm (13,5"x5,6"x12") 14,97 L/dm³

-

7,50 kg / 16,53 lbs.
-
87%

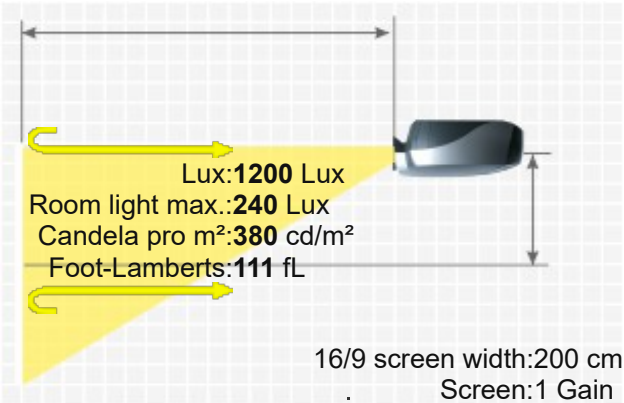

Frequenz Range max.: 205 MHz

Foot-Lamberts 111 fL / max. 528 cm screen width

380 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Eco Mode
- Lan network compatible.

Screen Mirroring -

Optional accessories

 Deckenhalterung Länge 100-120 mm Halterung120 47,86 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
115-784	2.67-4.16:1	5.3-8.3 m			Powered
115-489	1.14-1.74:1	2.3-3.5 m			Powered
115-488	0.86-1.16:1	1.7-2.3 m			Powered
115-485	1.71-2.37:1	3.4-4.7 m			Powered
Fix Optional Lenses					
115-487	0.79:1	1.6 m			No Zoom
115-486	0.99:1	2 m			No Zoom

Status 2015 Discontinued (EOL) // Last update of the data: 2025-03-03

Data Created: 2015-01-19 15:50:56

More Details



HCinema

<https://www.projector-database.com/pro/digitalprojectionivision50wuxgaxb-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.