

Sony VPL VW365ES

SONY VPL VW365ES



Brief Introduction

Beta 2.5

The Sony VPL VW365ES 3D SXRD projector has 1500 Ansi lumens and a UHD (4K+2K) 4096 x 2160 resolution. The manufacturer Sony specifies a lamp life of 6000 hours, which is over 8.2 years if enjoyed for two hours a day. The built-in lens shift function provides freedom when setting up. The projector can illuminate a picture width of up to 393 cm thanks to its 1500 Ansi lumens. In room lighting, however, the picture width should ideally be less than 262 cm. Playback of 1080P and 4K as well as 3D is also no problem for the projector, which means that all Blu-ray formats currently available can be recognized by the projector. With only 26 decibels of operating noise, the model is already very quiet compared to others. The model was built by Sony in 2015 and is no longer current.

Display Type

3 x 0,74" SXRD Panel
UHD 19/10 Silicon X-tal Reflective Display (SXRD)

Ansi-Lumen

1500

Contrast

-

Black Level

0,0085 min. Lumen

Lens shift

Vert.: +85% -80% Hori.: +/-31%

Resolution

UHD (4K+2K) 4096 x 2160
8.847.360 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, 3D, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray (60p)
Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

3D Compatibility

Frame Sequential (3D Ready)

Application

High-End Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

225W Lamp
Articel Nr.: LMP-H280

Light Life

6000 h. in Eco Mode

Operating Costs

8,22% / 0,06 €

Focus

Powered

Zoom

Powered 2,15

Objective

F=2,9-3,9 f=21,3-46,2 mm

Throw Ratio


1,27-2,73:1

Audio


-

Connections

2 x HDMI 2.0 und HDCP 2.2
RJ45 in
2 x 12V Trigger out

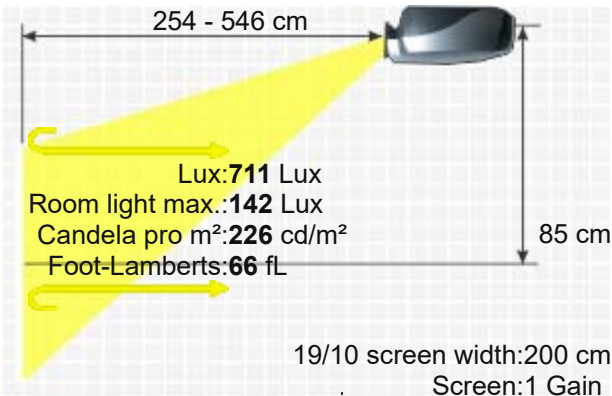

Ceiling Mounting	3D Sync
Power	RS232C
Size WxHxD	Yes
Operating Noise	410W
	495,6 x 195,3 x 463,6 mm (19,5"x7,7"x18,3") 44,69 L/dm³
	26dB
Weight	14,00 kg / 30,86 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 19-72 kHz V-sync: 48-92 Hz
Foot-Lamberts	66 fL / max. 287 cm screen width 226 cd/m²
Features	<div> <div>■</div>Real Full HD 3D <div>■</div>Full HD 1080P compatible <div>■</div>Lens shift Funktion <div>■</div>Eco Mode <div>■</div>sRGB <div>■</div>Gamma correction <div>■</div>Dynamic iris <div>■</div>Lan network compatible. </div>
Optional	<div> Remote control original RM-PJ22 / RM-PJ24 / RM-PJ28 </div> <div> Lamp original LMP-H280 </div>
Status	Order here: https://www.hcinema.de/lampen/shop-en.php?id=fro9002898
Data	2015 Discontinued (EOL) // Last update of the data: 2023-09-20 Created: 2015-11-04 15:28:57

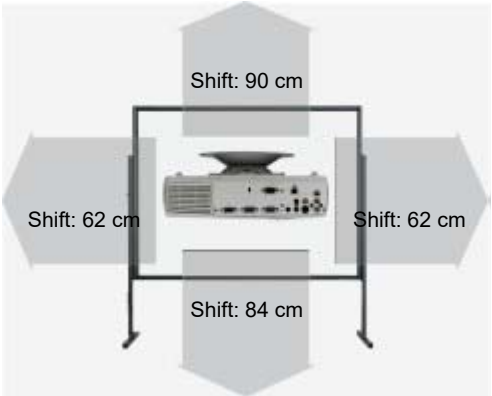

More Details



HCinema

<https://www.projector-database.com/pro/sonyvp1vw365es-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.