

Toshiba TDP TW95

TOSHIBA TDP TW95



Brief Introduction

Beta 2.5

The Toshiba model TDP TW95 is a DLP projector with XGA 1024 x 768 resolution and a contrast of 2000:1. The projector also offers an integrated media player that can be used to play files directly. A picture width of up to 408 cm is possible. However, the picture should be smaller in room lighting. We recommend max. 272 cm. The model was built by Toshiba in 2006 and is no longer current.

Display Type



1 x 0,55" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

Contrast

Black Level

Offset

Projector	2200	Screen	733 Lux (200 cm Screen width)
	2000:1 full on/off		2000:1 full on/off
	1,1000 min. Lumen		0,367 min. Lumen

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Media player formats: MPEG/AVI/ASF/WMV JPEG

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

210W Lamp

Article Nr.: TLPLW9

2000 h. 3000 h. inEco Mode

15% / 0,06 €

Automatic


Powered 1,6

F=2,07-2,64 f=20,5-32,8 mm

1,81-2,92:1

1W Mono

2 x D-sub 15pin in 1 x out
S-Video in
Cinch Video in
2 x Cinch Stereo in
Mini Jack in und out
RS232C
USB Typ A

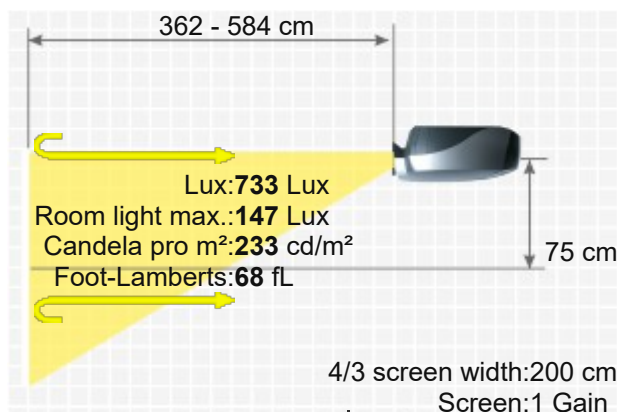



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
310W
300 x 99 x 218 mm (11,8"x3,9"x8,6") 6,47 L/dm³
-

Weight
Keystone
Illumination

3,00 kg / 6,61 lbs.
Vert.: +/-30°
-

Frequenz

H-sync: 15-120 kHz
V-sync: 50-150 Hz

Foot-Lamberts


68 fL / max. 408 cm screen width
233 cd/m²

Features

- Direkt Power Off
- Integrated Mediaplayer
- Blackboard Modus
- User logo
- Eco Mode
- Password protection
- Remote control with laser pointer und mouse control
- Wi-Fi network compatible.
-

Screen Mirroring

-

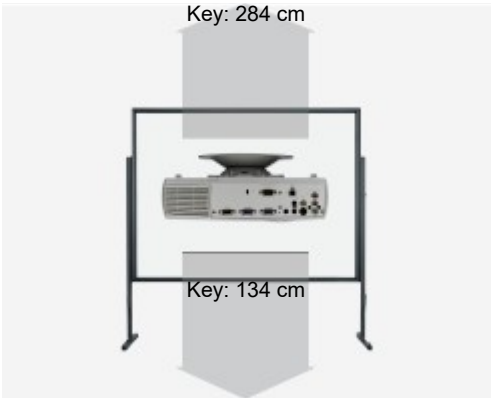

Optional accessories

	Lampe Ruby	Ruby-LMP4633	113,09 €
	Lampe Original	TLPLW9	EOL €
	Lampe Original	TLPLW9	EOL €
	Kompatible Lampe	LMP-K16525	76,12 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status 2006 Discontinued (EOL) // Last update of the data: 2026-06-09

Data



More Details



HCinema

<https://www.projector-database.com/pro/toshibatdptw95-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.