

Viewsonic PJ562

VIEWSONIC PJ562



Brief Introduction

Beta 2.5

The Viewsonic model PJ562 is an LCD projector with XGA 1024 x 768 resolution and a contrast of 400:1. The brightness of 2000 Ansi lumens enables a picture width of 389 cm. In room light, the picture should be max. 259 cm wide. The model was built by Viewsonic in 2005 and is no longer current.

Display Type



3 x 0,7" LCD TFT Panel mit MLA

XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

2000 / 1600 im Eco Mode

667 Lux (bei 200 cm Screen)

Contrast

400:1 full on/off

400:1 full on/off

Black Level

5,0000 min. Lumen

1,68 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

SXGA 1280 x 1024 compressed

PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC, EDTV HDTV 720p, 1080i, Standard-Portabel | External training and company presentations, as well as product presentations.

Application

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

165W UHB Lamp

Light Life

Articel Nr.: PRJ-RLC-015

2000 h. 4000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,7-1,9 f=21,7-26,1 mm

Throw Ratio

1,5-1,8:1

Audio

1 x 1W

Connections

2 x D-sub 15pin in 1 x out

Cinch Video in

Cinch Stereo in

S-Video in

2 x Mini Jack in 1 x out


USB

RS232C



Ceiling Mounting

Yes

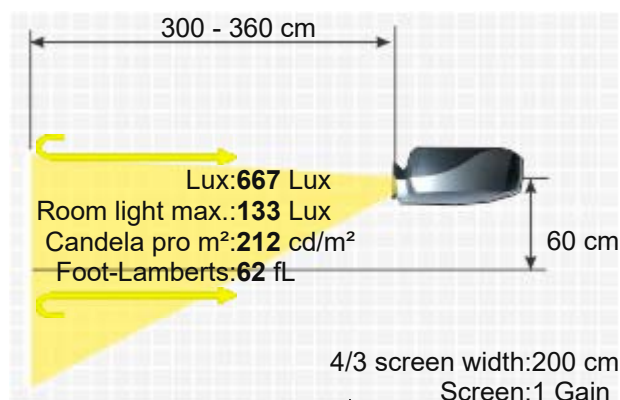

Power 240W
Size WxHxD 297 x 65 x 233 mm (11,7"x2,6"x9,2") 4,5 L/dm³
Operating Noise 36 / 32 dB in Eco Mode

Weight 2,50 kg / 5,51 lbs.
Keystone Vert.: +/-20°
Illumination -

Frequenz H-sync: 15-91 kHz
V-sync: 50-120 Hz

Foot-Lamberts 62 fL / max. 389 cm screen width
212 cd/m²


- Features
- Freeze
 - Blank (Black screen button)
 - User logo
 - Eco Mode
 - Kensington Slot
 - Gamma correction
 - Remote control with laser pointer und mouse control
 - Overscan adjustable
 - Digital Zoom
 - De-interlacer
 -

	Lamp ruby	Ruby-LMP4235
	Lamp incl. air filter original	PRJ-RLC-015
Optional	Compatible lamp	LMP-K4235
	Universal Remote original	Fernb-uni-V3
	Air filter original	NJ09702

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d4236>
2005 Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema
<https://www.projector-database.com/pro/viewsonicpj562-en.html>

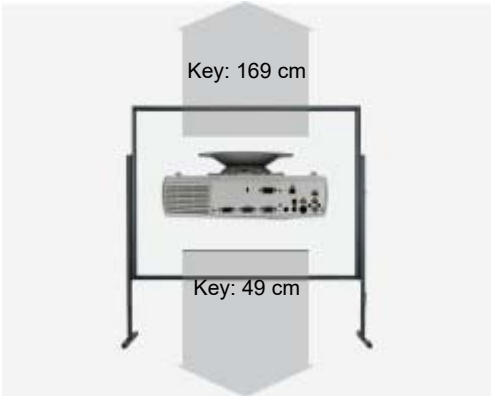

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.