

Viewsonic PJD6223

VIEWSONIC PJD6223



With the PJD6223, manufacturer Viewsonic offers a DLP projector with XGA 1024 x 768 resolution and a contrast of 4000:1. The lamp life is specified by the manufacturer as 4500 hours, which is over 6.2 years if enjoyed for two hours a day. The projector can illuminate a picture width of up to 453 cm with its 2700 Ansi lumens. In room light, however, the picture width should ideally be less than 302 cm. The projector can also display 1080P without any problems. The model was built by Viewsonic in 2011 and is no longer current.



1 x 0,55" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Projector	2700	900 Lux (bei 200 cm Screen)
Contrast	4000:1 full on/off	4000:1 full on/off
Black Level Offset	0,6750 min. Lumen	0,225 min. Lumen

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Frame Sequential (3D Ready)

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

180W Lamp

Articel Nr.: RLC-070

4500 h. 6000 h. in Eco Mode

-

Manual

Manual 1,1

-

1,86-2,04:1

10W Mono

HDMI 1.3 in

D-sub 15 pin in und out

S-Video in


Cinch Video in

Mini Jack Audio in und out

RS232C Din 9 pin in

RJ45 in

USB Typ B

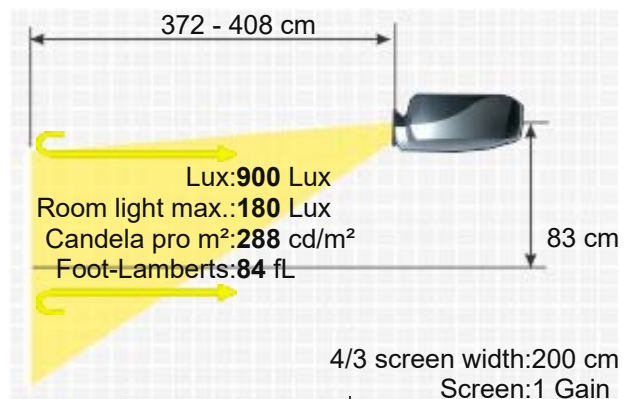

Ceiling Mounting Yes
Power 250W
Size WxHxD 294 x 84 x 242 mm (11,6"x3,3"x9,5") 5,98 L/dm³
Operating Noise 32 / 29 dB in Eco Mode

Weight 2,60 kg / 5,73 lbs.
Keystone Vert.: +/-40°
Illumination 90%

Frequenz H-sync: 31-100 kHz
V-sync: 50-120 Hz

Foot-Lamberts 84 fL / max. 453 cm screen width
288 cd/m²

- Full HD 1080P compatible
- Freeze
- Blank (Black screen button)
- Blackboard Modus
- Eco Mode
- Kensington Slot
- Password protection
- BrilliantColor™
- Remote control with laser pointer und mouse control
- PJLink™
- Control via web browser
- Lan network compatible.
- Crestron®-Software compatible.
- 6-segment RGBCYW colour wheel

Optional Lamp original RLC-070
Remote control original A-00009442

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=20544>
2011 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/viewsonicpjd6223-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.