

Dukane ImagePro 8049B



DUKANE IMAGEPRO 8049B



Brief Introduction

Beta 2.5

The Dukane ImagePro 8049B standard portable LCD projector has 1700 Ansi lumens, a contrast of 400:1 and an SVGA 800 x 600 resolution. A picture width of up to 359 cm is possible. However, the image should be smaller in room light. We recommend max. 239 cm. The projector is no longer sold by the manufacturer.



3 x 0,7" LCD TFT Panel

SVGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

1700 / 1300 im Eco Mode

400:1 full on/off

4,2500 min. Lumen

SVGA 800 x 600

480.000 Pixel

NTSC, NTSC 4.43, PAL, MPAL,

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

150W UHP Lamp

Articel Nr.: 456-215

2000 h.

-

Manual

Manual 1,2

F=1,7-1,9

1,5-1,8:1

2 x 1W

(1) Min DIN 4-pin, s-video

(1) RCA, composite video

(1) Audio, Stereo, RCA x 2

(2) Signal: D-sub, 15 pin

(2) Audio, Stereo, mini jack

Output, Audio (1) Stereo, mini jack

Outputs Monitor 15 pin, D-sub

Outputs,Control 15 pin, D-sub, RS232C, PS/2,

Yes

240W

-

37 / 33 dB in Eco Mode

Weight

Keystone

Illumination

Frequenz

H-sync: 15-91 kHz

V-sync: 50-120 Hz


Foot-Lamberts

51 fL / max. 359 cm screen width

550 Lux (bei 203 cm Screen)

400:1 full on/off

1.386 min. Lumen

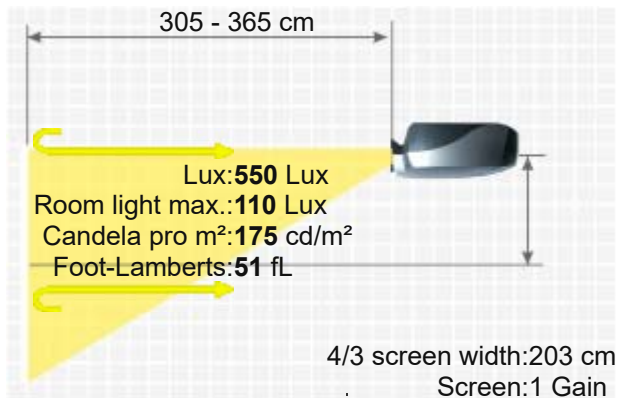

175 cd/m²

- Freeze
- Blank (Black screen button)
- Eco Mode
- Kensington Slot
- Gamma correction
- Remote control with mouse control
- Overscan adjustable

Features

Status
Data

- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro8049b-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.