

Vivitek D551



VIVITEK D551



The standard portable D551 3D BrilliantColor DLP has 3000 Ansi lumens, a contrast of 15000:1 and an XGA 1024 x 768 resolution. The service life of the lamp is up to 5000 hours, which is over 6.8 years if enjoyed for two hours a day. 3000 Ansi lumens ensure that a picture width of 477 cm is also possible. However, if room light is available, the picture should be a maximum of 318 cm wide. Playing 1080P is also no problem for the projector. The model was built by Vivitek in 2013 and is no longer current.

Brief Introduction

Display Type

1 x 0,55" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

3000

1000 Lux (bei 200 cm Screen)

Contrast

15000:1 full on/off

15000:1 full on/off

Black Level

0,2000 min. Lumen

0,067 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

3D Compatibility

Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

-
Articel Nr.: 5811118154-SVV

Light Life

5000 h. 6000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,11

Objective

F=2,52-2,73 f=21,8-24,0 mm

Throw Ratio

1,92-2,14:1

Audio

2W Mono

Connections

2 x D-sub 15pin in 1 x out
Cinch Video in
S-Video in
Mini Jack Audio in und out
USB in
RS232C Din 9 pin in

Ceiling Mounting

Yes

Power



240 / 200W in Eco Mode

Size WxHxD

274, x 100 x 212 mm (10,8"x3,9"x8,3") 5,81 L/dm³

Operating Noise

35 / 32 dB in Eco Mode

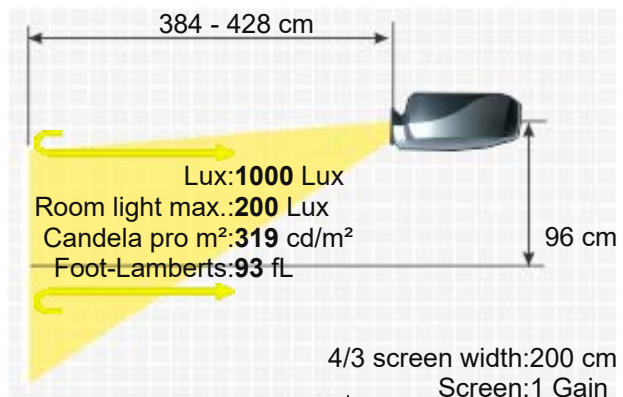

Weight

2,30 kg / 5,07 lbs.

Keystone

Vert.: +/-40°

Illumination

95%

Frequenz H-sync: 15,30-91,4 kHz
V-sync: 24-120 Hz

Foot-Lamberts 93 fL / max. 477 cm screen width

319 cd/m²

- Features
- Full HD 1080P compatible
 - Eco Mode
 - Kensington Slot
 - BrilliantColor™
 - Remote control with laser pointer

Optional Lamp original 5811118154-SVV

Remote control original 5041849100

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=21986>

Data 2013 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/vivitek551-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.