

Vivitek DH856e

VIVITEK DH856E



The standard portable Vivitek DH856e 3D BrilliantColor DLP projector has 5000 Ansi lumens, a contrast of 15000:1 and an HDTV 1920 x 1080 resolution. The horizontal and vertical keystone correction provides leeway when setting up. The projector can illuminate an image width of up to 718 cm thanks to its 5000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 479 cm. It is also Full HD 1080P and 3D compatible. The model was built by Vivitek in 2020 and is no longer current.



1 x 0,65" DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Projector	5000	2222 Lux (bei 200 cm Screen)
	15000:1	15000:1
Screen	0,3333 min. Lumen	0,148 min. Lumen

Resolution: HDTV 1920 x 1080
2.073.600 Pixel
WUXGA 1920 x 1200 compressed
Video Modes: Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
3D Compatibility: Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)
Application: Standard-Portabel | External training and company presentations, as well as product presentations.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source: 310W/250W Lamp
Light Life: Articiel Nr.: SS-5811126482-VV
3000 / 5000 h. in Eco Mode

Operating Costs: 14,29% / 0,06 €

Focus: Manual


Zoom: Manual 1,5

Objective: F=2,42-2,97 f=20,7-31,05 mm

Throw Ratio: 1,39-2,09:1

Audio: 10W Mono

Connections: 2 x HDMI in
D-sub 15pin in und out
Mini Jack Audio in und out
USB
RS232C Din 9 pin in
RJ45 in
12V Trigger

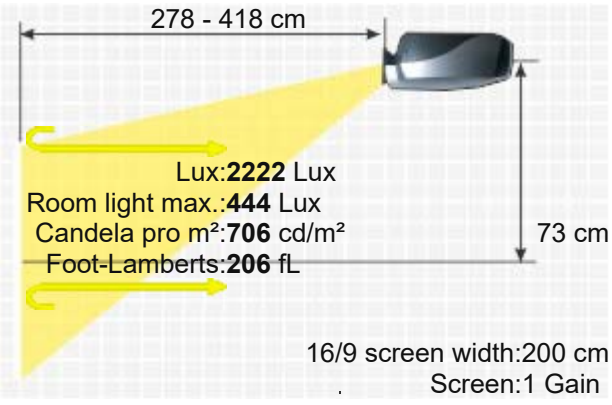

Brief Introduction

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections


Ceiling Mounting Yes
Power 390W / 310W in Eco Mode
Size WxHxD 314 x 126 x 213 mm (12,4"x5"x8,4") 8,43 L/dm³
Operating Noise 36 / 31 dB in Eco Mode

Weight 3,40 kg / 6,61 lbs.
Keystone Vert.: +/-30°
Hori.: +/-30°
Illumination -

Frequenz H-sync: 15,31-91,4 kHz
V-sync: 24-120 Hz

Foot-Lamberts 206 fL / max. 718 cm screen width
706 cd/m²

- Features
- Real Full HD 3D
 - Full HD 1080P compatible
 - Eco Mode
 - Kensington Slot
 - BrilliantColor™
 - Optional Wi-Fi network compatible.
 - Lan network compatible.
 - HDMI-based multimedia or NovoConnect
- Status 2020 Discontinued (EOL) // Last update of the data: 2024-08-06
Data Created: 2024-07-17 09:28:11

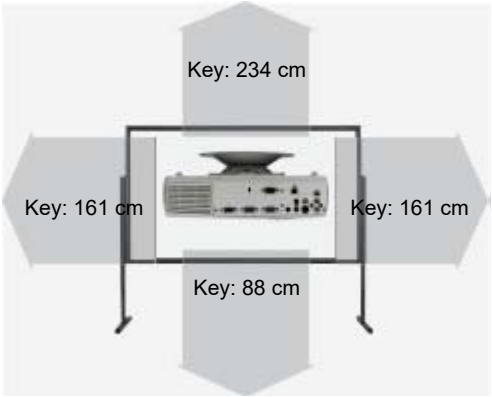

More Details



<https://www.projector-database.com/pro/vivitekdh856e-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.