

Dukane ImagePro 9011

DUKANE IMAGEPRO 9011



Brief Introduction

Beta 2.5

The standard portable Dukane ImagePro 9011 DILA projector has 1000 Ansi lumens, a contrast of 350:1 and an SXGA+ 1365 x 1024 resolution. Thanks to the brightness of 1000 Ansi lumens, a picture width of 275 cm is possible. In room light, the picture should be max. 183 cm wide. On the market since 2000, the model is no longer offered by the manufacturer Dukane.



3 x 0,9 D-ILA

SXGA 4/3 Direct-Drive Image Light Amplification (D-ILA)

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

Data

Projector
1000
350:1 full on/off
2,8571 min. Lumen

Screen
333 Lux (bei 200 cm Screen)
350:1 full on/off
0,96 min. Lumen

SXGA+ 1365 x 1024
1.397.760 Pixel

NTSC, PAL, MPAL, NPAL, PAL60, SECAM, Component, 480i, 575k, 480p, 1080i, 720p, HDTV
Standard-Portabel | External training and company presentations, as well as product

presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

420W Xenon Lamp

Articel Nr.: 456-205

1000 h.

Powered

Powered

-

-

2 x 1W

Cinch Video in

S-Video in

D-sub 15pin in

Yes

850W

-

-

-

-

-

H-sync: 15,0-82,0 kHz


V-sync: 50-78 Hz

31 fL / max. 275 cm screen width

106 cd/m²

-

2000 Discontinued (EOL) // Last update of the data: 2023-08-04

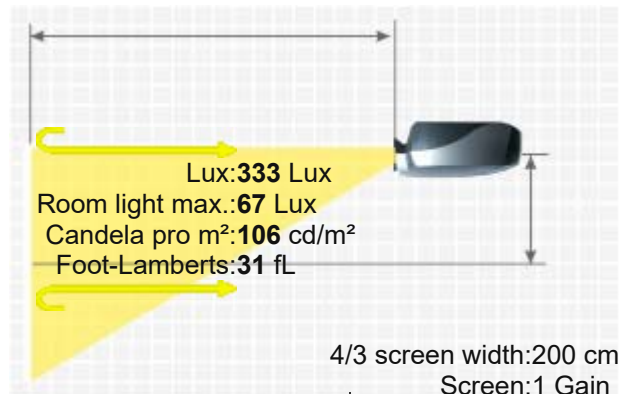

HCinema

<https://www.projector-database.com/pro/dukaneimagepro9011-en.html>

More Details