

easyview PX621

EASYVIEW PX621



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The easyview PX621 standard portable DLP projector has 2000 Ansi lumens, a contrast of 2000:1 and an SVGA 800 x 600 resolution. The projector can illuminate a picture width of up to 389 cm thanks to the 2000 Ansi lumens. In room lighting, however, the image width should ideally be less than 259 cm. The model built in 2006 is no longer offered by easyview.



1 x 0,55" 12 Grad DDR DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Projector

2000

2000:1 full on/off

1,0000 min. Lumen

Screen

667 Lux (bei 200 cm Screen)

2000:1 full on/off

0,334 min. Lumen

SVGA 800 x 600

480.000 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

205W Lamp

2000 h.

-

Manual

Manual 1,2

-

-

1 x 2W

D-sub 15 pin in

S-Video in

Cinch Video in

Yes


250W

265 x 97 x 202 mm (10,4"x3,8"x8") 5,19 L/dm³

34dB

2,40 kg / 5,29 lbs.

Vert.: +/-15°

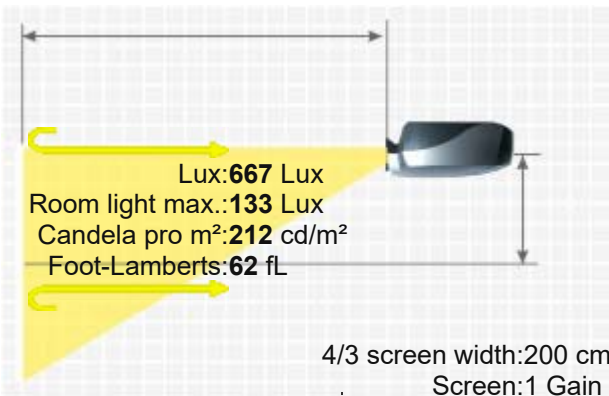

Illumination	80%
Frequenz	-
Foot-Lamberts	62 fL / max. 389 cm screen width 212 cd/m²
Features	■ 4-segment colour wheel
Status	2006 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/easyviewpx621-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.