

Eiki LC XT4

EIKI LC XT4



With the LC XT4, manufacturer Eiki offers an LCD projector with XGA 1024 x 768 resolution and a contrast of 1300:1. The projector also offers a lens shift function that makes image adjustment childs play. 954 cm image width, the projector will be able to illuminate well. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 636 cm here. On the market since 2006, this model is no longer offered by the manufacturer Eiki, but is still very popular in our projector database.

Brief Introduction

Beta 2.5

Display Type



3 x 1,8" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

12000

4000 Lux (bei 200 cm Screen)

Contrast

1300:1 full on/off

1300:1 full on/off

Black Level

9,2308 min. Lumen

3,084 min. Lumen

Lens shift

Vert.: +/-50% Hori.: +/-10% motorisch max.

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

Application

PAL/PAL-M&N/SECAM/NTSC/NTSC4.43HDTV (720p, 1080i, 1035i)

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

4 x 300W UHP Lamp

Light Life

Articel Nr.: 610 327 4928 / LMP100

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

2 x 3W Stereo

Connections

Input 1:

1 x DVI-I (Digital und Analog)

2 x RCA (R, L) für Audio,

1 x Mini DIN 8-PIN (Maus-Kontroll-Anschluß)

Input 2:

1 x BNC x 5 (R, G, B, H, V & Y, Pb/Cb, Pr/Cr),


2 x RCA (R, L) für Audio

1 x Mini DIN 8-PIN (Maus-Kontroll-Anschluß)

Input 3:

2 x BNC Composite und S-Video

1 x Mini DIN 4-PIN S-Video,

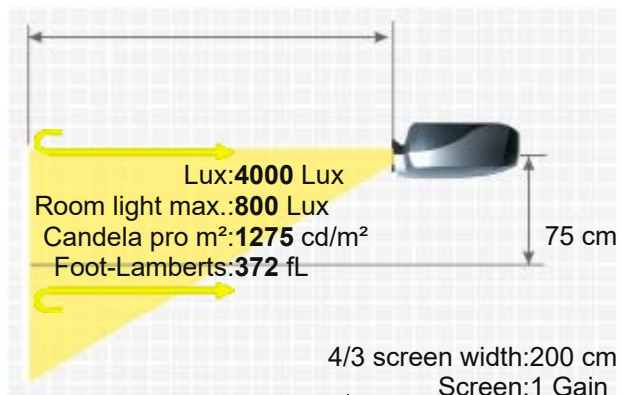

2 x RCA (R, L)

Input 4:

1 x D-SUB 15

2 x RCA (R, L)

1 x Mini DIN 8-PIN (Maus-Kontroll-Anschluß)

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Yes

1700W

581 x 252 x 783 mm (22,9"x9,9"x30,8") 114,64 L/dm³

46dB

Weight

Keystone

Illumination

36,50 kg / 80,47 lbs.

Vert.: +/-30°

-

Frequenz

H-sync: 15-120 kHz

V-sync: 50-120 Hz

Range max.: 230 MHz

Foot-Lamberts

372 fL / max. 954 cm screen width

1275 cd/m²

- Lens shift Funktion motorisch max.

■ Freeze

■ Gamma correction

■ 24/7 continuous operation capable

■ Remote control with laser pointer und mouse control

■ Optional LAN network compatible.

■ Digital Zoom

■ 2 lamp and 4 lamp mode
- Features

Please note

Angaben im Prospekt englisch sind mit vorsicht zu beachten.


	Bulb only	NLMP4903
	Single lamp ruby	Ruby-LMP4903
	Single lamp original	610-327-4928 / LMP100 / ET-SLMP100
	Compatible lamp	LMP-K16051
Optional	Universal Remote original	Fernb-uni-V3
	Air filter compatible	Alternative zu:MT8A / 910 301 4815
	Remote control original	945 088 0750 / CXVC/CXVY
	Air filter original	MT8A / 910 301 4815

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n16051>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Eiki AH-32601 (W06)	1.24-1.57:1	2.5-3.1 m	+/-40%	+/-10%	Powered
Eiki AH-32581 (T03)	6.12-8.89:1	12.2-17.8 m	+/-40%	+/-10%	Manual
Eiki AH-32401 (W04)	1.59-2.08:1	3.2-4.2 m	+/-40%	+/-10%	Powered
Eiki AH-22051 (S03)	2.63-3.56:1	5.3-7.1 m	+/-40%	+/-10%	Powered
Eiki AH-21202 (W02Z)	1.42-1.84:1	2.8-3.7 m	+/-40%	+/-10%	Powered
Eiki AH-21102 (S02Z)	2.05-2.65:1	4.1-5.3 m	+/-50%	+/-10%	Powered
Eiki AH-21091 (T02)	4.29-6:1	8.6-12 m	+/-40%	+/-10%	Powered
Eiki AH-21022 (M01Z)	3.38-4.39:1	6.8-8.8 m	+/-40%	+/-10%	Powered
Eiki 0001-4299	7.37-12.61:1	14.7-25.2 m	+/-40%	+/-10%	Manual
Eiki 0001-4297	1.9-3.45:1	3.8-6.9 m	+/-40%	+/-10%	Manual
Eiki 0001-4261	5-8.53:1	10-17.1 m	+/-40%	+/-10%	Manual
Eiki 0001-4260	3.09-5.32:1	6.2-10.6 m	+/-40%	+/-10%	Manual
Fix Optional Lenses					
Eiki AH-32021 (W03)	0.81:1	1.6 m	0.0% Fix		No Zoom
Eiki AH-21032 (T01Z)	6.89:1	13.8 m	+/-40%	+/-10%	No Zoom
Eiki AH-21012 (W01Z)	1.21:1	2.4 m	+/-40%	+/-10%	No Zoom

Status

2006 Discontinued (EOL) // Last update of the data: 2023-08-04

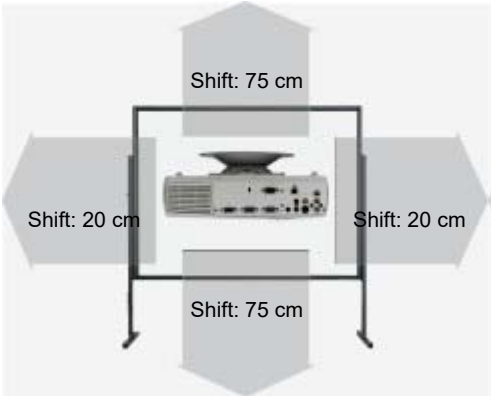

Data



More Details



HCinema

<https://www.projector-database.com/pro/eikilcxt4-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.