Elmo EDP S40



Display Type	3 x 0,7" TFT Panel SVGA 4/3 Liquid Crystal Display		
Ansi-Lumen	1600		518 Lux (bei 203 cm Screen)
Contrast	-		-
Black Level	-		-
Offset	-		
Resolution	SVGA 800 x 600 480.000 Pixel		
Video Modes	NTSC, NTSC4.43, PAL, SECAM, PAL-M,		
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.		
Light Source	150W UHB Lamp Articel Nr.: EDP S40		
Light Life	2000 h.		
Operating Costs	-		
Focus	Manual		
Zoom	Manual 1,2		
Objective	F=1,7-1,9 f=21,7-26,1 mm		
Throw Ratio	1,53-1,83:1		
Audio	1W Mono		
Connections	RGB Input D-sub 15pin x 2 Audio Input 3.5 mm Stereo Mini-jack x1 (from the computer) Video input Composite Video: RCA jack x1S-Video: Mini-Din 4p x1Component Video: Accesory component video Kabel Audio Input RCA jack (L,R) x1RGB Monitor output 15 P D-sub x1 Control 15 P D-sub x1 for RS232C, USB x1 for Maus control		
Ceiling Mounting	-		
Power	240W		
Size WxHxD	295 x 76 x 231 mm (11,6"x3"x9,1") 5,18 L/dm³		
Operating Noise	39 / 34 dB in Eco Mode		
Weight	2,70 kg / 5,95 lbs.		
Keystone	-		
Illumination	-		

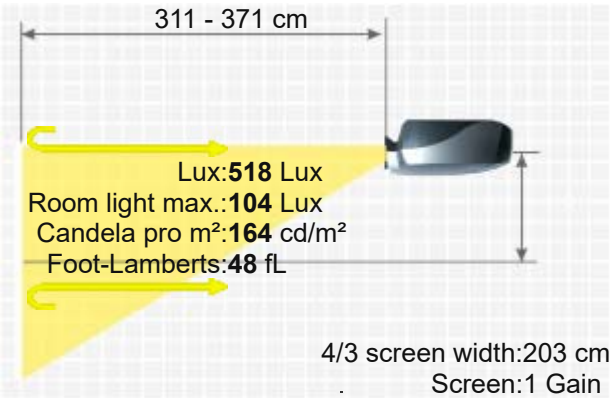

ELMO EDP S40

Frequenz	-	
Foot-Lamberts	48 fL / max. 348 cm screen width	
	164 cd/m²	
Features	■ Eco Mode	
Optional	Osram bulb only	NLMP1458
	Lamp ruby	Ruby-LMP1458
	Lamp original	9469
	Compatible lamp	LMP-K1458
Status	Order here: https://www.hcinema.de/lampen/shop-en.php?id=n1459 - Discontinued (EOL) // Last update of the data: 2023-08-04	
Data		
More Details	HCinema https://www.projector-database.com/pro/elmoedps40-en.html	

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.