Enthronic E320X



3LCD Motor Pointer USB

Brief Introduction Beta 2.5	The stationary Enthronic E320X LCD projector has 2500 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. A picture width of up to 435 cm is possible. However, the image should be smaller in room light. We recommend max. 290 cm. The projector is no longer sold by the manufacturer.
Display Type	3 x 1,3" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Projector: Ansi-Lumen	2500
Projector: Contrast	400:1 full on/off
Projector: Black Level	6,2500 min. Lumen
Projector: Offset	-
Screen	809 Lux (bei 203 cm Screen) 400:1 full on/off 2.038 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	HDTV, 480p, 720p, 1080i, NTSC, NTSC 4.43 PAL / PAL-M / PAL-N , SECAM
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	200W UHL Lamp
Light Life	2500 h.
Operating Costs	-
Focus	Powered
Zoom	Powered 1,31
Objective	F=2,0 f=55-72 mm
Throw Ratio	2,08-2,73:1
Audio	2 x 3W
Connections	S-Video & Composite Video 2 x D-sub 15pin in 1 x out Cinch Video in Cinch Stereo in PS/2 Maus & USB Maus
Ceiling Mounting	-
Power	300W standby:10W
Size WxHxD	274 x 140 x 350 mm (10,8"x5,5"x13,8") 13,43 L/dm³
Operating Noise	-
Weight	-
Keystone	Vert.: +/-15°
Illumination	90%
Frequenz	H-sync: 15,63-91 kHz V-sync: 50-100 Hz
Foot-Lamberts	75 fL / max. 435 cm screen width 257 cd/m²

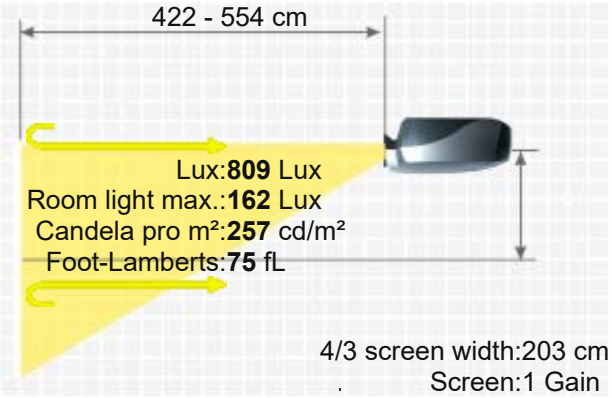

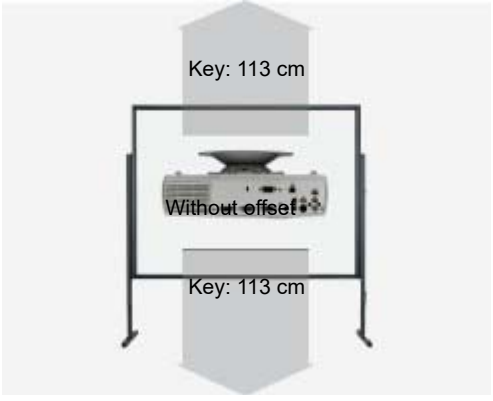

ENTHRONIC E320X

	■ Freeze
Features	■ Remote control with laser pointer
	■ 3:2 / 2:2 pull down
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	
More Details	https://www.projector-database.com/pro/enthronic320x-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.