

Faroudja B1-LED-PICO



Display Type	1 x LCoS Panel SVGA 4/3 Liquid Crystal on Silicon (LCOS)	
Ansi-Lumen	Projector 35	Screen 12 Lux (bei 200 cm Screen)
Contrast	-	-
Black Level	-	-
Offset	-	-
Resolution	SVGA 800 x 600 480.000 Pixel	
Video Modes	PAL, SECAM, NTSC	
Application	Game-Portabel Very portable, small-screen projections. Very narrow picture width and rooms with very little light.	
Light Source	LED	
Light Life	-	

Operating Costs 0,00 € LED

Focus Manual

Zoom No Zoom

Objective -

Throw Ratio -

Audio -

Connections 1 x Mini USB
1 x MicroSD Card Slot
1 x VGA D-Sub 15pin
1 x Composite

Ceiling Mounting -

Power -

Size WxHxD 127 x 25,4 x 76,2 mm (5"x1"x3") 0,24 L/dm³

Operating Noise -

Weight 0,230 kg / 0,51 lbs.


Keystone -

Illumination -

Frequenz -

Foot-Lamberts 1 fL / max. 52 cm screen width
3 cd/m²

Features -
Status - Discontinued (EOL) // Last update of the data: 2023-08-04
Data

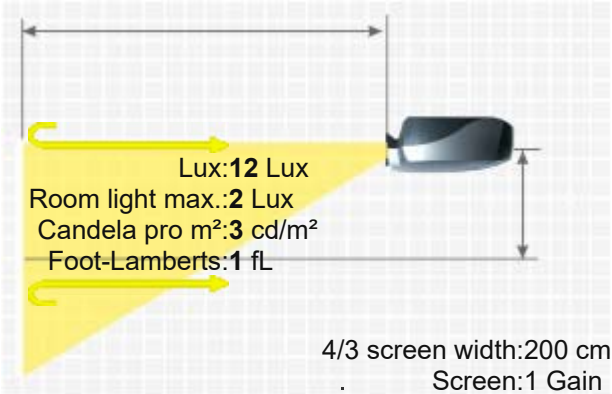



HCinema

<https://www.projector-database.com/pro/favib1ledpico-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.