


Fujitsu PJ S1700



Display Type	 3 x 1,3" LCD TFT Panel SVGA 4/3 Liquid Crystal Display
Ansi-Lumen	1700
Contrast	-
Black Level	-
Offset	-
Resolution	SVGA 800 x 600 480.000 Pixel XGA 1024 x 768 compressed
Video Modes	PAL, SECAM, NTSC
Application	Standard-Portabel External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	190W Lamp
Light Life	-
Operating Costs	-
Focus	Powered
Zoom	Powered 1,3
Objective	-
Throw Ratio	-
Audio	1,2W
Connections	2 x D-sub 15pin in 1 x out Cinch Video in Cinch Stereo in S-Video in Mini Jack USB RS232C
Ceiling Mounting	Yes
Power	320W
Size WxHxD	289 x 124 x 395 mm (11,4"x4,9"x15,6") 14,16 L/dm³
Operating Noise	-
Weight	5,90 kg / 13,01 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15-60 kHz V-sync: 50-85 Hz
Foot-Lamberts	53 fL / max. 359 cm screen width 182 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	



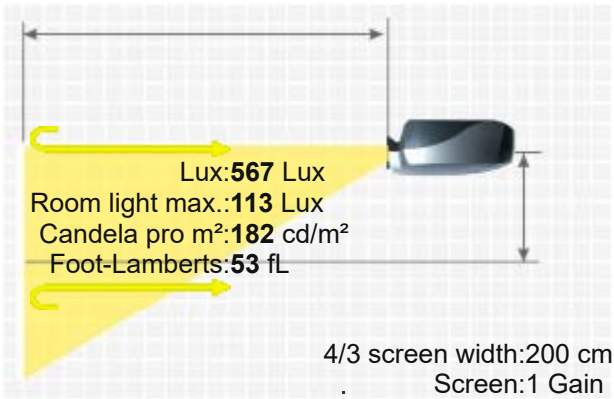

More Details

HCinema

<https://www.projector-database.com/pro/fujitsupjs1700-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.